


## Bezeichnung: HTD 3M

Teilung: **3 mm**  
Für Zahnriemenbreite: **9 mm**

Werkstoff (WS): Aluminium  
UNI 9006-T6 (Al)  
geeignet zum  
Harteloxieren

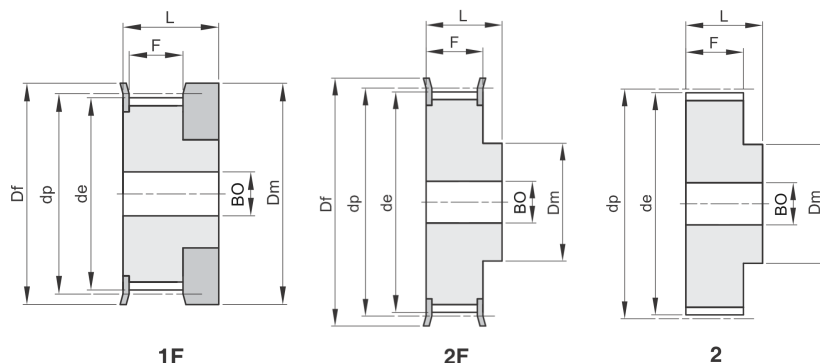


| Bestellnummer | Code     | Typ | WS | ZZ | dp    | de    | Df   | Dm   | F    | L    | BO |
|---------------|----------|-----|----|----|-------|-------|------|------|------|------|----|
| 900-001-0010  | 10 3M 09 | 1F  | Al | 10 | 9,55  | 8,79  | 13,0 | 12,0 | 10,2 | 17,5 |    |
| 900-001-0012  | 12 3M 09 | 1F  | Al | 12 | 11,46 | 10,70 | 15,0 | 15,0 | 10,2 | 17,5 |    |
| 900-001-0014  | 14 3M 09 | 1F  | Al | 14 | 13,37 | 12,61 | 16,0 | 16,0 | 10,2 | 17,5 |    |
| 900-001-0015  | 15 3M 09 | 1F  | Al | 15 | 14,32 | 13,56 | 18,0 | 17,5 | 10,2 | 17,5 |    |
| 900-001-0016  | 16 3M 09 | 2F  | Al | 16 | 15,28 | 14,52 | 18,0 | 10,0 | 12,8 | 20,6 | 4  |
| 900-001-0018  | 18 3M 09 | 2F  | Al | 18 | 17,19 | 16,43 | 19,5 | 11,0 | 12,8 | 20,6 | 6  |
| 900-001-0020  | 20 3M 09 | 2F  | Al | 20 | 19,10 | 18,34 | 23,0 | 13,0 | 12,8 | 20,6 | 6  |
| 900-001-0021  | 21 3M 09 | 2F  | Al | 21 | 20,05 | 19,29 | 25,0 | 14,0 | 12,8 | 20,6 | 6  |
| 900-001-0022  | 22 3M 09 | 2F  | Al | 22 | 21,01 | 20,25 | 25,0 | 14,0 | 12,8 | 20,6 | 6  |
| 900-001-0024  | 24 3M 09 | 2F  | Al | 24 | 22,92 | 22,16 | 25,0 | 14,0 | 12,8 | 20,6 | 6  |
| 900-001-0026  | 26 3M 09 | 2F  | Al | 26 | 24,83 | 24,07 | 28,0 | 16,0 | 12,8 | 20,6 | 6  |
| 900-001-0028  | 28 3M 09 | 2F  | Al | 28 | 26,74 | 25,98 | 32,0 | 18,0 | 12,8 | 20,6 | 6  |
| 900-001-0030  | 30 3M 09 | 2F  | Al | 30 | 28,65 | 27,89 | 32,0 | 20,0 | 12,8 | 20,6 | 6  |
| 900-001-0032  | 32 3M 09 | 2F  | Al | 32 | 30,56 | 29,80 | 36,0 | 22,0 | 12,8 | 20,6 | 6  |
| 900-001-0036  | 36 3M 09 | 2F  | Al | 36 | 34,38 | 33,62 | 38,0 | 26,0 | 13,4 | 22,2 | 6  |
| 900-001-0040  | 40 3M 09 | 2F  | Al | 40 | 38,20 | 37,44 | 42,0 | 28,0 | 13,4 | 22,2 | 6  |
| 900-001-0044  | 44 3M 09 | 2F  | Al | 44 | 42,02 | 41,26 | 48,0 | 33,0 | 13,4 | 22,2 | 6  |
| 900-001-0048  | 48 3M 09 | 2   | Al | 48 | 45,84 | 45,08 |      | 33,0 | 13,4 | 22,2 | 8  |
| 900-001-0060  | 60 3M 09 | 2   | Al | 60 | 57,30 | 56,54 |      | 33,0 | 13,4 | 22,2 | 8  |
| 900-001-0072  | 72 3M 09 | 2   | Al | 72 | 68,76 | 68,00 |      | 33,0 | 13,4 | 22,2 | 8  |

### Bezeichnung: HTD 3M

Teilung: **3 mm**  
Für Zahnriemenbreite: **15 mm**

Werkstoff (WS): **Al=Aluminium**  
**UNI 9006-T6 (Al)**  
geeignet z. Harteloxieren

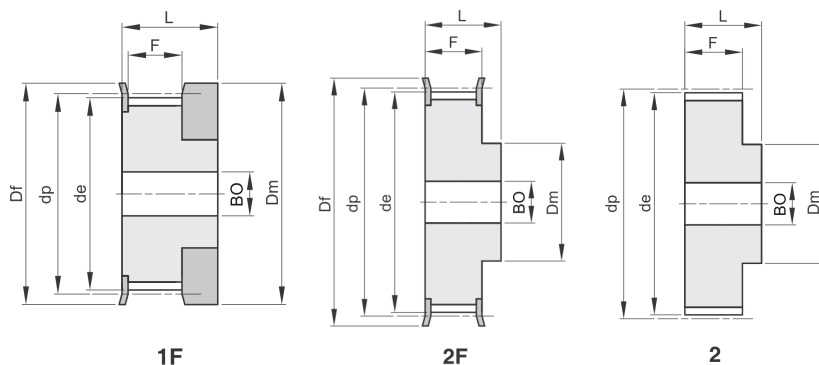


| Bestellnummer | Code     | Typ | WS | ZZ | dp    | de    | Df   | Dm   | F    | L  | BO |
|---------------|----------|-----|----|----|-------|-------|------|------|------|----|----|
| 900-002-0010  | 10 3M 15 | 1F  | Al | 10 | 9,55  | 8,79  | 13,0 | 12,0 | 17,0 | 26 |    |
| 900-002-0012  | 12 3M 15 | 1F  | Al | 12 | 11,46 | 10,70 | 15,0 | 15,0 | 17,0 | 26 |    |
| 900-002-0014  | 14 3M 15 | 1F  | Al | 14 | 13,37 | 12,61 | 16,0 | 16,0 | 17,0 | 26 |    |
| 900-002-0015  | 15 3M 15 | 1F  | Al | 15 | 14,32 | 13,56 | 18,0 | 17,5 | 17,0 | 26 |    |
| 900-002-0016  | 16 3M 15 | 2F  | Al | 16 | 15,28 | 14,52 | 18,0 | 10,0 | 19,5 | 26 | 4  |
| 900-002-0018  | 18 3M 15 | 2F  | Al | 18 | 17,19 | 16,43 | 19,5 | 11,0 | 19,5 | 26 | 6  |
| 900-002-0020  | 20 3M 15 | 2F  | Al | 20 | 19,10 | 18,34 | 23,0 | 13,0 | 19,5 | 26 | 6  |
| 900-002-0021  | 21 3M 15 | 2F  | Al | 21 | 20,05 | 19,29 | 25,0 | 14,0 | 19,5 | 26 | 6  |
| 900-002-0022  | 22 3M 15 | 2F  | Al | 22 | 21,01 | 20,25 | 25,0 | 14,0 | 19,5 | 26 | 6  |
| 900-002-0024  | 24 3M 15 | 2F  | Al | 24 | 22,92 | 22,16 | 25,0 | 14,0 | 19,5 | 26 | 6  |
| 900-002-0026  | 26 3M 15 | 2F  | Al | 26 | 24,83 | 24,07 | 28,0 | 16,0 | 19,5 | 26 | 6  |
| 900-002-0028  | 28 3M 15 | 2F  | Al | 28 | 26,74 | 25,98 | 32,0 | 18,0 | 19,5 | 26 | 6  |
| 900-002-0030  | 30 3M 15 | 2F  | Al | 30 | 28,65 | 27,89 | 32,0 | 20,0 | 19,5 | 26 | 6  |
| 900-002-0032  | 32 3M 15 | 2F  | Al | 32 | 30,56 | 29,80 | 36,0 | 22,0 | 19,5 | 26 | 6  |
| 900-002-0036  | 36 3M 15 | 2F  | Al | 36 | 34,38 | 33,62 | 38,0 | 26,0 | 20,0 | 30 | 6  |
| 900-002-0040  | 40 3M 15 | 2F  | Al | 40 | 38,20 | 37,44 | 42,0 | 28,0 | 20,0 | 30 | 6  |
| 900-002-0044  | 44 3M 15 | 2F  | Al | 44 | 42,02 | 41,26 | 48,0 | 33,0 | 20,0 | 30 | 6  |
| 900-002-0048  | 48 3M 15 | 2   | Al | 48 | 45,84 | 45,08 |      | 33,0 | 20,0 | 30 | 8  |
| 900-002-0060  | 60 3M 15 | 2   | Al | 60 | 57,30 | 56,54 |      | 33,0 | 20,0 | 30 | 8  |
| 900-002-0072  | 72 3M 15 | 2   | Al | 72 | 68,76 | 68,00 |      | 33,0 | 20,0 | 30 | 8  |

## Bezeichnung: HTD 5M

Teilung: **5 mm**  
Für Zahnriemenbreite: **9 mm**

Werkstoff (WS): **St=Stahl**  
**Al=Aluminium**  
UNI 9006-T6 (Al)  
geeignet z. Harteloxieren

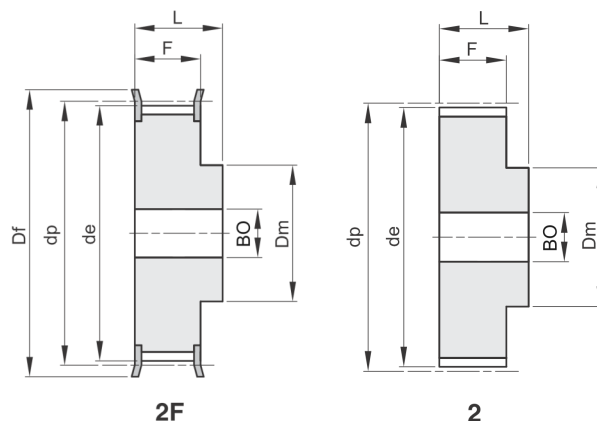


| Bestellnummer | Code     | Typ | WS | ZZ | dp     | de     | Df | Dm   | F    | L    | BO |
|---------------|----------|-----|----|----|--------|--------|----|------|------|------|----|
| 900-004-0012  | 12 5M 09 | 2F  | St | 12 | 19,10  | 17,96  | 23 | 12,5 | 14,5 | 20,0 | 6  |
| 900-004-0014  | 14 5M 09 | 2F  | St | 14 | 22,28  | 21,14  | 25 | 13,5 | 14,5 | 20,0 | 6  |
| 900-004-0015  | 15 5M 09 | 2F  | St | 15 | 23,87  | 22,73  | 28 | 16,0 | 14,5 | 20,0 | 6  |
| 900-004-0016  | 16 5M 09 | 2F  | St | 16 | 25,46  | 24,32  | 28 | 16,5 | 14,5 | 20,0 | 6  |
| 900-004-0018  | 18 5M 09 | 2F  | St | 18 | 28,65  | 27,51  | 32 | 20,0 | 14,5 | 20,0 | 6  |
| 900-004-0020  | 20 5M 09 | 2F  | St | 20 | 31,83  | 30,69  | 36 | 23,0 | 14,5 | 22,5 | 6  |
| 900-004-0021  | 21 5M 09 | 2F  | St | 21 | 33,42  | 32,28  | 38 | 24,0 | 14,5 | 22,5 | 6  |
| 900-004-0022  | 22 5M 09 | 2F  | St | 22 | 35,01  | 33,87  | 38 | 25,5 | 14,5 | 22,5 | 6  |
| 900-004-0024  | 24 5M 09 | 2F  | St | 24 | 38,20  | 37,06  | 42 | 27,0 | 14,5 | 22,5 | 6  |
| 900-004-0026  | 26 5M 09 | 2F  | St | 26 | 41,38  | 40,24  | 44 | 30,0 | 14,5 | 22,5 | 6  |
| 900-004-0028  | 28 5M 09 | 2F  | St | 28 | 44,56  | 43,42  | 48 | 30,5 | 14,5 | 22,5 | 6  |
| 900-004-0030  | 30 5M 09 | 2F  | St | 30 | 47,75  | 46,60  | 51 | 35,0 | 14,5 | 22,5 | 6  |
| 900-004-0032  | 32 5M 09 | 2F  | St | 32 | 50,93  | 49,79  | 54 | 38,0 | 14,5 | 22,5 | 8  |
| 900-004-0036  | 36 5M 09 | 2F  | St | 36 | 57,30  | 56,16  | 60 | 38,0 | 14,5 | 22,5 | 8  |
| 900-004-0040  | 40 5M 09 | 2F  | St | 40 | 63,66  | 62,52  | 71 | 38,0 | 14,5 | 22,5 | 8  |
| 900-004-0044  | 44 5M 09 | 2   | Al | 44 | 70,03  | 68,89  |    | 38,0 | 14,5 | 25,5 | 8  |
| 900-004-0048  | 48 5M 09 | 2   | Al | 48 | 76,39  | 75,25  |    | 45,0 | 14,5 | 25,5 | 8  |
| 900-004-0060  | 60 5M 09 | 2   | Al | 60 | 95,49  | 94,35  |    | 45,0 | 14,5 | 25,5 | 8  |
| 900-004-0072  | 72 5M 09 | 2   | Al | 72 | 114,59 | 113,45 |    | 45,0 | 14,5 | 25,5 | 8  |

### Bezeichnung: HTD 5M

Teilung: **5 mm**  
Für Zahnriemenbreite: **15 mm**

Werkstoff (WS): **St=Stahl**  
**Al=Aluminium**  
UNI 9006-T6 (Al)  
geeignet z. Harteloxieren

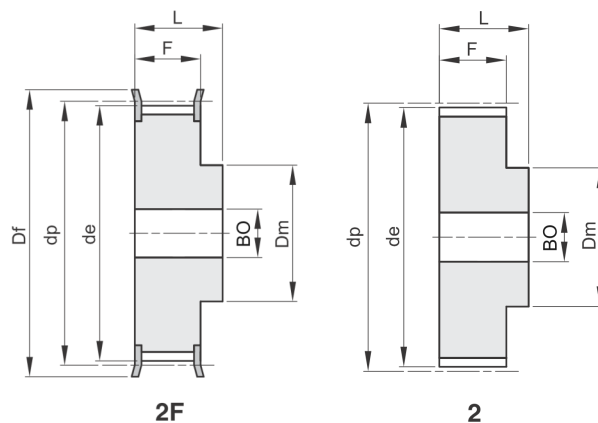


| Bestellnummer | Code     | Typ | WS | ZZ | dp     | de     | Df | Dm   | F    | L  | BO |
|---------------|----------|-----|----|----|--------|--------|----|------|------|----|----|
| 900-005-0012  | 12 5M 15 | 2F  | St | 12 | 19,10  | 17,96  | 23 | 12,5 | 20,5 | 26 | 6  |
| 900-005-0014  | 14 5M 15 | 2F  | St | 14 | 22,28  | 21,14  | 25 | 13,5 | 20,5 | 26 | 6  |
| 900-005-0015  | 15 5M 15 | 2F  | St | 15 | 23,87  | 22,73  | 28 | 16,0 | 20,5 | 26 | 6  |
| 900-005-0016  | 16 5M 15 | 2F  | St | 16 | 25,46  | 24,32  | 28 | 16,5 | 20,5 | 26 | 6  |
| 900-005-0018  | 18 5M 15 | 2F  | St | 18 | 28,65  | 27,51  | 32 | 20,0 | 20,5 | 26 | 6  |
| 900-005-0020  | 20 5M 15 | 2F  | St | 20 | 31,83  | 30,69  | 36 | 23,0 | 20,5 | 26 | 6  |
| 900-005-0021  | 21 5M 15 | 2F  | St | 21 | 33,42  | 32,28  | 38 | 24,0 | 20,5 | 26 | 6  |
| 900-005-0022  | 22 5M 15 | 2F  | St | 22 | 35,01  | 33,87  | 38 | 25,5 | 20,5 | 26 | 6  |
| 900-005-0024  | 24 5M 15 | 2F  | St | 24 | 38,20  | 37,06  | 42 | 27,0 | 20,5 | 28 | 6  |
| 900-005-0026  | 26 5M 15 | 2F  | St | 26 | 41,38  | 40,24  | 44 | 30,0 | 20,5 | 28 | 6  |
| 900-005-0028  | 28 5M 15 | 2F  | St | 28 | 44,56  | 43,42  | 48 | 30,5 | 20,5 | 28 | 6  |
| 900-005-0030  | 30 5M 15 | 2F  | St | 30 | 47,75  | 46,60  | 51 | 35,0 | 20,5 | 28 | 6  |
| 900-005-0032  | 32 5M 15 | 2F  | St | 32 | 50,93  | 49,79  | 54 | 38,0 | 20,5 | 28 | 8  |
| 900-005-0036  | 36 5M 15 | 2F  | St | 36 | 57,30  | 56,16  | 60 | 38,0 | 20,5 | 28 | 8  |
| 900-005-0040  | 40 5M 15 | 2F  | St | 40 | 63,66  | 62,52  | 71 | 38,0 | 20,5 | 28 | 8  |
| 900-005-0044  | 44 5M 15 | 2   | Al | 44 | 70,03  | 68,89  |    | 38,0 | 20,5 | 30 | 8  |
| 900-005-0048  | 48 5M 15 | 2   | Al | 48 | 76,39  | 75,25  |    | 38,0 | 20,5 | 30 | 8  |
| 900-005-0060  | 60 5M 15 | 2   | Al | 60 | 95,49  | 94,35  |    | 50,0 | 20,5 | 30 | 8  |
| 900-005-0072  | 72 5M 15 | 2   | Al | 72 | 114,59 | 113,45 |    | 50,0 | 20,5 | 30 | 8  |

## Bezeichnung: HTD 5M

Teilung: **5 mm**  
Für Zahnriemenbreite: **25 mm**

Werkstoff (WS): **St=Stahl**  
**Al=Aluminium**  
UNI 9006-T6 (Al)  
geeignet z. Harteloxieren

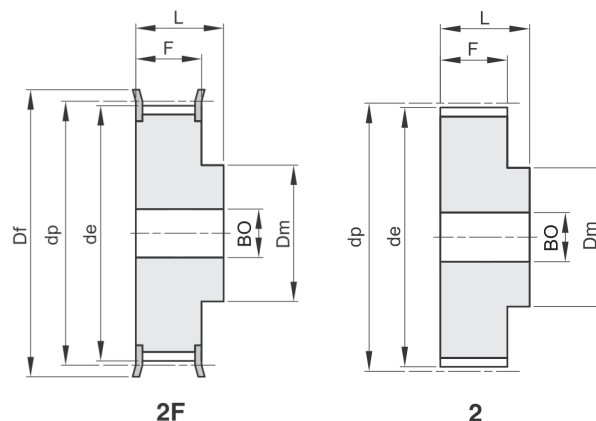


| Bestellnummer | Code     | Typ | WS | ZZ | dp     | de     | Df | Dm   | F    | L  | BO |
|---------------|----------|-----|----|----|--------|--------|----|------|------|----|----|
| 900-006-0012  | 12 5M 25 | 2F  | St | 12 | 19,10  | 17,96  | 23 | 12,5 | 30,5 | 36 | 6  |
| 900-006-0014  | 14 5M 25 | 2F  | St | 14 | 22,28  | 21,14  | 25 | 13,5 | 30,5 | 36 | 6  |
| 900-006-0015  | 15 5M 25 | 2F  | St | 15 | 23,87  | 22,73  | 28 | 16,0 | 30,5 | 36 | 6  |
| 900-006-0016  | 16 5M 25 | 2F  | St | 16 | 25,46  | 24,32  | 28 | 16,5 | 30,5 | 36 | 6  |
| 900-006-0018  | 18 5M 25 | 2F  | St | 18 | 28,65  | 27,51  | 32 | 20,0 | 30,5 | 36 | 6  |
| 900-006-0020  | 20 5M 25 | 2F  | St | 20 | 31,83  | 30,69  | 36 | 23,0 | 30,5 | 36 | 6  |
| 900-006-0021  | 21 5M 25 | 2F  | St | 21 | 33,42  | 32,28  | 38 | 24,0 | 30,5 | 38 | 6  |
| 900-006-0022  | 22 5M 25 | 2F  | St | 22 | 35,01  | 33,87  | 38 | 25,5 | 30,5 | 38 | 6  |
| 900-006-0024  | 24 5M 25 | 2F  | St | 24 | 38,20  | 37,06  | 42 | 27,0 | 30,5 | 38 | 6  |
| 900-006-0026  | 26 5M 25 | 2F  | St | 26 | 41,38  | 40,24  | 44 | 30,0 | 30,5 | 38 | 6  |
| 900-006-0028  | 28 5M 25 | 2F  | St | 28 | 44,56  | 43,42  | 48 | 30,5 | 30,5 | 38 | 6  |
| 900-006-0030  | 30 5M 25 | 2F  | St | 30 | 47,75  | 46,60  | 51 | 35,0 | 30,5 | 38 | 6  |
| 900-006-0032  | 32 5M 25 | 2F  | St | 32 | 50,93  | 49,79  | 54 | 38,0 | 30,5 | 38 | 8  |
| 900-006-0036  | 36 5M 25 | 2F  | St | 36 | 57,30  | 56,16  | 60 | 38,0 | 30,5 | 38 | 8  |
| 900-006-0040  | 40 5M 25 | 2F  | St | 40 | 63,66  | 62,52  | 71 | 38,0 | 30,5 | 38 | 8  |
| 900-006-0044  | 44 5M 25 | 2   | Al | 44 | 70,03  | 68,89  |    | 38,0 | 30,5 | 40 | 8  |
| 900-006-0048  | 48 5M 25 | 2   | Al | 48 | 76,39  | 75,25  |    | 38,0 | 30,5 | 40 | 8  |
| 900-006-0060  | 60 5M 25 | 2   | Al | 60 | 95,49  | 94,35  |    | 50,0 | 30,5 | 40 | 8  |
| 900-006-0072  | 72 5M 25 | 2   | Al | 72 | 114,59 | 113,45 |    | 50,0 | 30,5 | 40 | 8  |

### Bezeichnung: HTD 8M

Teilung: **8 mm**  
Für Zahnriemenbreite: **20 mm**

Werkstoff (WS): St=Stahl  
GG=Grauguss

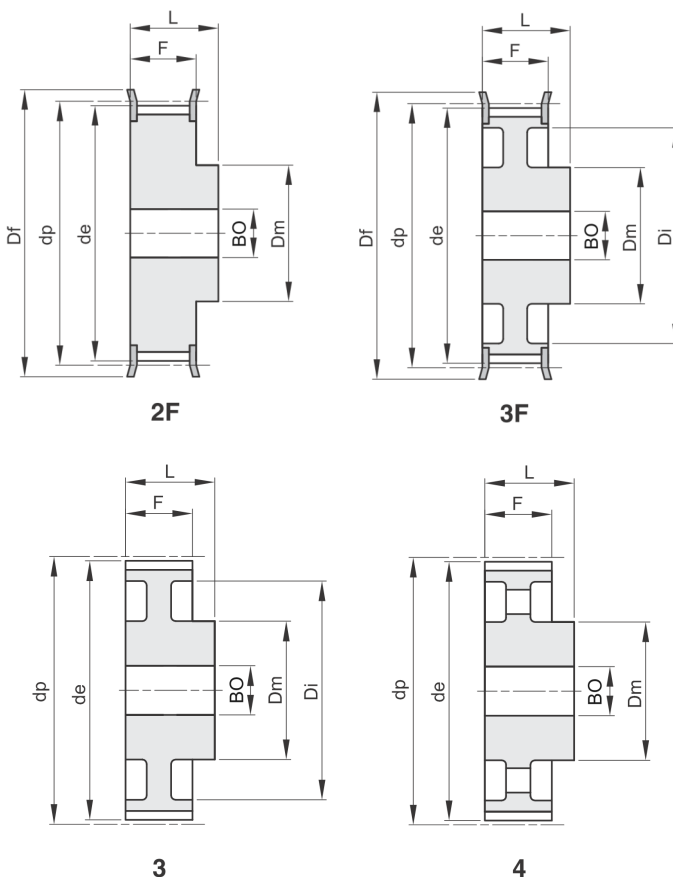


| Bestellnummer | Code      | Typ | WS | ZZ  | dp     | de     | Df  | Dm  | Di  | F  | L  | BO |
|---------------|-----------|-----|----|-----|--------|--------|-----|-----|-----|----|----|----|
| 900-007-0022  | 22 8M 20  | 2F  | St | 22  | 56,02  | 54,65  | 60  | 43  |     | 28 | 38 | 12 |
| 900-007-0024  | 24 8M 20  | 2F  | St | 24  | 61,11  | 59,74  | 66  | 45  |     | 28 | 38 | 12 |
| 900-007-0026  | 26 8M 20  | 2F  | St | 26  | 66,21  | 64,84  | 71  | 48  |     | 28 | 38 | 12 |
| 900-007-0028  | 28 8M 20  | 2F  | St | 28  | 71,30  | 70,08  | 75  | 50  |     | 28 | 38 | 14 |
| 900-007-0030  | 30 8M 20  | 2F  | St | 30  | 76,39  | 75,13  | 83  | 55  |     | 28 | 38 | 14 |
| 900-007-0032  | 32 8M 20  | 2F  | St | 32  | 81,49  | 80,16  | 87  | 60  |     | 28 | 38 | 14 |
| 900-007-0034  | 34 8M 20  | 2F  | St | 34  | 86,58  | 85,21  | 91  | 66  |     | 28 | 38 | 14 |
| 900-007-0036  | 36 8M 20  | 2F  | St | 36  | 91,67  | 90,30  | 98  | 70  |     | 28 | 38 | 14 |
| 900-007-0038  | 38 8M 20  | 2F  | St | 38  | 96,77  | 95,39  | 103 | 75  |     | 28 | 38 | 14 |
| 900-007-0040  | 40 8M 20  | 2F  | St | 40  | 101,86 | 100,49 | 106 | 75  |     | 28 | 38 | 14 |
| 900-007-0044  | 44 8M 20  | 2F  | St | 44  | 112,05 | 110,67 | 119 | 75  |     | 28 | 38 | 14 |
| 900-007-0048  | 48 8M 20  | 2F  | St | 48  | 122,23 | 120,86 | 127 | 75  |     | 28 | 38 | 14 |
| 900-007-0056  | 56 8M 20  | 3F  | St | 56  | 142,60 | 141,23 | 148 | 80  | 116 | 28 | 38 | 14 |
| 900-007-0064  | 64 8M 20  | 3F  | St | 64  | 162,97 | 161,60 | 168 | 80  | 137 | 28 | 38 | 14 |
| 900-007-0072  | 72 8M 20  | 3F  | St | 72  | 183,35 | 181,97 | 192 | 80  | 158 | 28 | 38 | 14 |
| 900-007-0080  | 80 8M 20  | 3   | GG | 80  | 203,72 | 202,35 |     | 90  | 180 | 28 | 38 | 14 |
| 900-007-0090  | 90 8M 20  | 3   | GG | 90  | 229,18 | 227,81 |     | 90  | 204 | 28 | 38 | 14 |
| 900-007-0112  | 112 8M 20 | 4   | GG | 112 | 285,21 | 283,83 |     | 90  | 254 | 28 | 38 | 18 |
| 900-007-0144  | 144 8M 20 | 4   | GG | 144 | 366,69 | 365,32 |     | 90  | 336 | 28 | 38 | 20 |
| 900-007-0168  | 168 8M 20 | 4   | GG | 168 | 427,81 | 426,44 |     | 100 | 400 | 28 | 38 | 20 |
| 900-007-0192  | 192 8M 20 | 4   | GG | 192 | 488,92 | 487,55 |     | 100 | 460 | 28 | 38 | 20 |

## Bezeichnung: HTD 8M

Teilung: **8 mm**  
Für Zahnriemenbreite: **30 mm**

Werkstoff (WS): St=Stahl  
GG=Grauguss

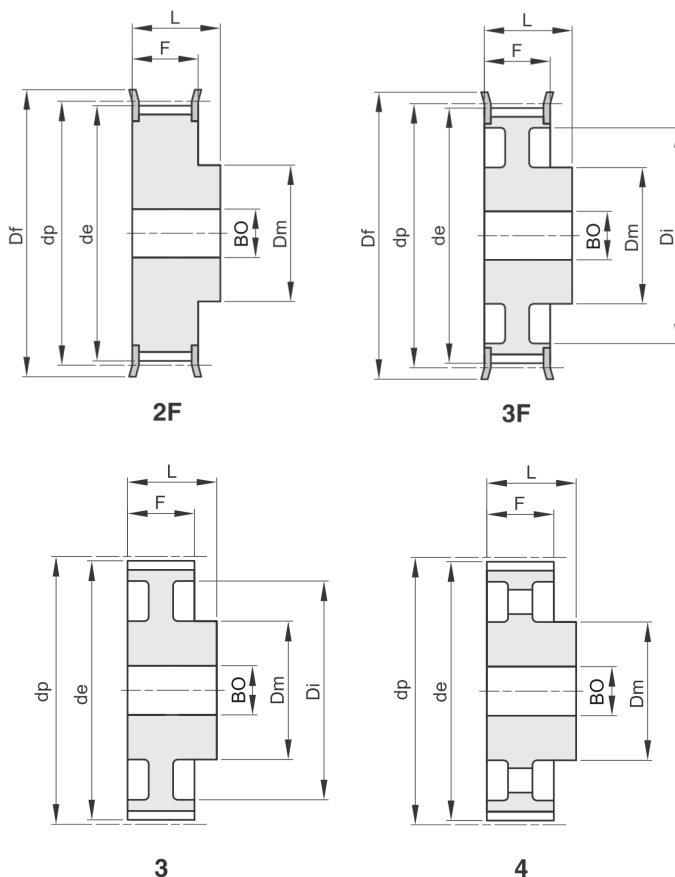


| Bestellnummer | Code      | Typ | WS | ZZ  | dp     | de     | Df  | Dm  | Di  | F  | L  | BO |
|---------------|-----------|-----|----|-----|--------|--------|-----|-----|-----|----|----|----|
| 900-008-0022  | 22 8M 30  | 2F  | St | 22  | 56,02  | 54,65  | 60  | 43  |     | 38 | 48 | 12 |
| 900-008-0024  | 24 8M 30  | 2F  | St | 24  | 61,11  | 59,74  | 66  | 45  |     | 38 | 48 | 12 |
| 900-008-0026  | 26 8M 30  | 2F  | St | 26  | 66,21  | 64,84  | 71  | 48  |     | 38 | 48 | 12 |
| 900-008-0028  | 28 8M 30  | 2F  | St | 28  | 71,30  | 70,08  | 75  | 50  |     | 38 | 48 | 14 |
| 900-008-0030  | 30 8M 30  | 2F  | St | 30  | 76,39  | 75,13  | 83  | 55  |     | 38 | 48 | 14 |
| 900-008-0032  | 32 8M 30  | 2F  | St | 32  | 81,49  | 80,16  | 87  | 60  |     | 38 | 48 | 14 |
| 900-008-0034  | 34 8M 30  | 2F  | St | 34  | 86,58  | 85,21  | 91  | 66  |     | 38 | 48 | 14 |
| 900-008-0036  | 36 8M 30  | 2F  | St | 36  | 91,67  | 90,30  | 98  | 70  |     | 38 | 48 | 14 |
| 900-008-0038  | 38 8M 30  | 2F  | St | 38  | 96,77  | 95,39  | 103 | 75  |     | 38 | 48 | 14 |
| 900-008-0040  | 40 8M 30  | 2F  | St | 40  | 101,86 | 100,49 | 106 | 75  |     | 38 | 48 | 14 |
| 900-008-0044  | 44 8M 30  | 2F  | St | 44  | 112,05 | 110,67 | 119 | 75  |     | 38 | 48 | 14 |
| 900-008-0048  | 48 8M 30  | 2F  | St | 48  | 122,23 | 120,86 | 127 | 75  |     | 38 | 48 | 14 |
| 900-008-0056  | 56 8M 30  | 3F  | St | 56  | 142,60 | 141,23 | 148 | 90  | 116 | 38 | 48 | 14 |
| 900-008-0064  | 64 8M 30  | 3F  | St | 64  | 162,97 | 161,60 | 168 | 90  | 137 | 38 | 48 | 14 |
| 900-008-0072  | 72 8M 30  | 3F  | St | 72  | 183,35 | 181,97 | 192 | 95  | 158 | 38 | 48 | 14 |
| 900-008-0080  | 80 8M 30  | 3   | GG | 80  | 203,72 | 202,35 |     | 100 | 180 | 38 | 48 | 14 |
| 900-008-0090  | 90 8M 30  | 3   | GG | 90  | 229,18 | 227,81 |     | 100 | 204 | 38 | 48 | 14 |
| 900-008-0112  | 112 8M 30 | 4   | GG | 112 | 285,21 | 283,83 |     | 100 | 254 | 38 | 48 | 18 |
| 900-008-0144  | 144 8M 30 | 4   | GG | 144 | 366,69 | 365,32 |     | 100 | 336 | 38 | 48 | 20 |
| 900-008-0168  | 168 8M 30 | 4   | GG | 168 | 427,81 | 426,44 |     | 100 | 400 | 38 | 48 | 20 |
| 900-008-0192  | 192 8M 30 | 4   | GG | 192 | 488,92 | 487,55 |     | 100 | 460 | 38 | 48 | 20 |

### Bezeichnung: HTD 8M

Teilung: **8 mm**  
Für Zahnriemenbreite: **50 mm**

Werkstoff (WS): St=Stahl  
GG=Grauguss

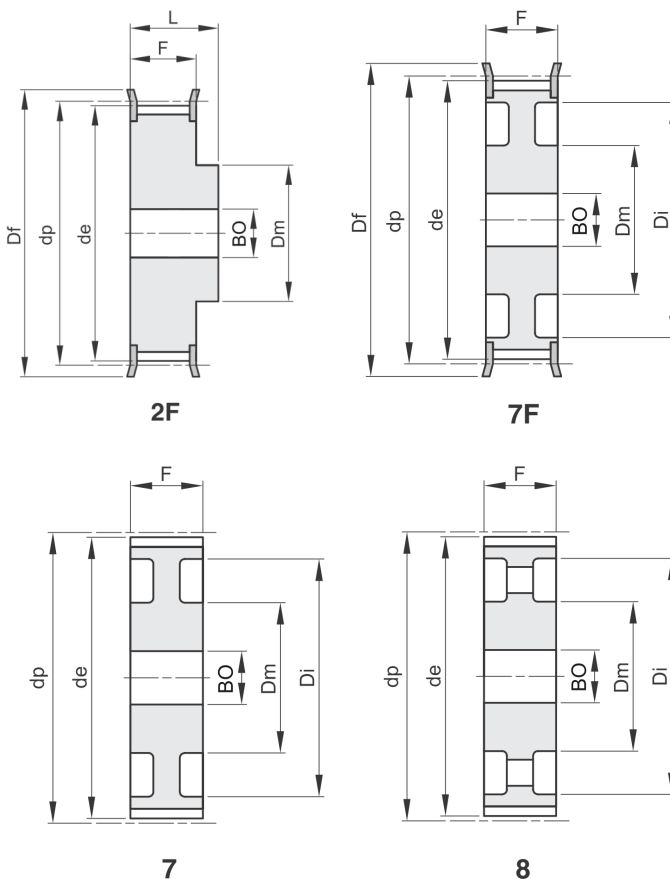


| Bestellnummer | Code      | Typ | WS | ZZ  | dp     | de     | Df  | Dm  | Di  | F  | L  | BO |
|---------------|-----------|-----|----|-----|--------|--------|-----|-----|-----|----|----|----|
| 900-009-0022  | 22 8M 50  | 2F  | St | 22  | 56,02  | 54,65  | 60  | 43  |     | 60 | 70 | 12 |
| 900-009-0024  | 24 8M 50  | 2F  | St | 24  | 61,11  | 59,74  | 66  | 45  |     | 60 | 70 | 12 |
| 900-009-0026  | 26 8M 50  | 2F  | St | 26  | 66,21  | 64,84  | 71  | 48  |     | 60 | 70 | 12 |
| 900-009-0028  | 28 8M 50  | 2F  | St | 28  | 71,30  | 70,08  | 75  | 50  |     | 60 | 70 | 14 |
| 900-009-0030  | 30 8M 50  | 2F  | St | 30  | 76,39  | 75,13  | 83  | 55  |     | 60 | 70 | 14 |
| 900-009-0032  | 32 8M 50  | 2F  | St | 32  | 81,49  | 80,16  | 87  | 60  |     | 60 | 70 | 14 |
| 900-009-0034  | 34 8M 50  | 2F  | St | 34  | 86,58  | 85,21  | 91  | 66  |     | 60 | 70 | 14 |
| 900-009-0036  | 36 8M 50  | 2F  | St | 36  | 91,67  | 90,30  | 98  | 70  |     | 60 | 70 | 14 |
| 900-009-0038  | 38 8M 50  | 2F  | St | 38  | 96,77  | 95,39  | 103 | 75  |     | 60 | 70 | 14 |
| 900-009-0040  | 40 8M 50  | 2F  | St | 40  | 101,86 | 100,49 | 106 | 75  |     | 60 | 70 | 14 |
| 900-009-0044  | 44 8M 50  | 2F  | St | 44  | 112,05 | 110,67 | 119 | 75  |     | 60 | 70 | 14 |
| 900-009-0048  | 48 8M 50  | 2F  | St | 48  | 122,23 | 120,86 | 127 | 75  |     | 60 | 70 | 14 |
| 900-009-0056  | 56 8M 50  | 7F  | St | 56  | 142,60 | 141,23 | 148 | 90  | 116 | 60 | 60 | 18 |
| 900-009-0064  | 64 8M 50  | 7F  | St | 64  | 162,97 | 161,60 | 168 | 100 | 137 | 60 | 60 | 18 |
| 900-009-0072  | 72 8M 50  | 7F  | St | 72  | 183,35 | 181,97 | 192 | 100 | 158 | 60 | 60 | 18 |
| 900-009-0080  | 80 8M 50  | 7   | GG | 80  | 203,72 | 202,35 |     | 110 | 180 | 60 | 60 | 18 |
| 900-009-0090  | 90 8M 50  | 7   | GG | 90  | 229,18 | 227,81 |     | 110 | 204 | 60 | 60 | 18 |
| 900-009-0112  | 112 8M 50 | 8   | GG | 112 | 285,21 | 283,83 |     | 110 | 254 | 60 | 60 | 18 |
| 900-009-0144  | 144 8M 50 | 8   | GG | 144 | 366,69 | 365,32 |     | 110 | 336 | 60 | 60 | 20 |
| 900-009-0168  | 168 8M 50 | 8   | GG | 168 | 427,81 | 426,44 |     | 120 | 400 | 60 | 60 | 20 |
| 900-009-0192  | 192 8M 50 | 8   | GG | 192 | 488,92 | 487,55 |     | 130 | 460 | 60 | 60 | 20 |

## Bezeichnung: HTD 8M

Teilung: **8 mm**  
Für Zahnriemenbreite: **85 mm**

Werkstoff (WS): St=Stahl  
GG=Grauguss

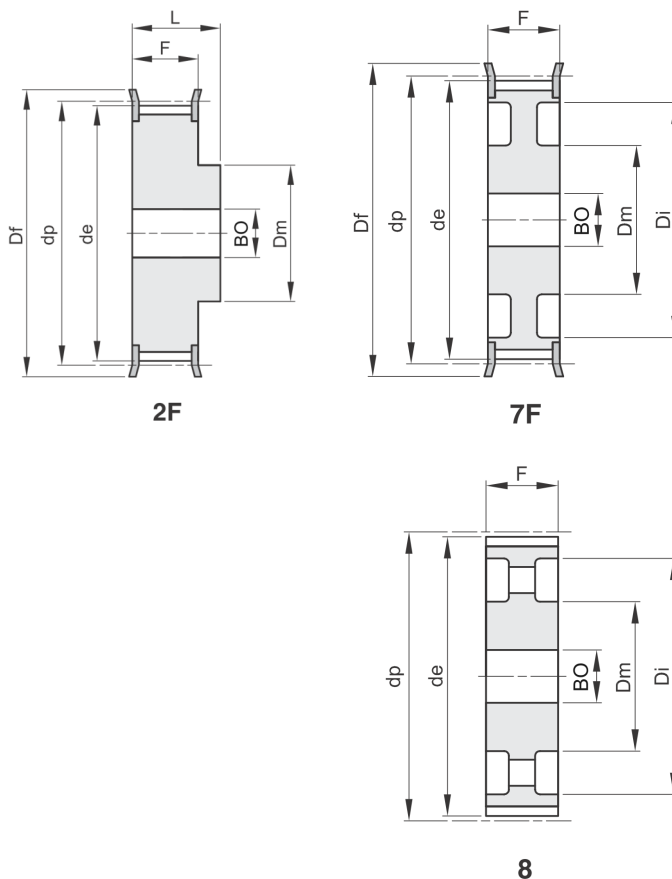


| Bestellnummer | Code      | Typ | WS | ZZ  | dp     | de     | Df  | Dm  | Di  | F  | L   | BO |
|---------------|-----------|-----|----|-----|--------|--------|-----|-----|-----|----|-----|----|
| 900-010-0022  | 22 8M 85  | 2F  | St | 22  | 56,02  | 54,65  | 60  | 43  |     | 95 | 105 | 12 |
| 900-010-0024  | 24 8M 85  | 2F  | St | 24  | 61,11  | 59,74  | 66  | 45  |     | 95 | 105 | 12 |
| 900-010-0026  | 26 8M 85  | 2F  | St | 26  | 66,21  | 64,84  | 71  | 48  |     | 95 | 105 | 12 |
| 900-010-0028  | 28 8M 85  | 2F  | St | 28  | 71,30  | 70,08  | 75  | 50  |     | 95 | 105 | 14 |
| 900-010-0030  | 30 8M 85  | 2F  | St | 30  | 76,39  | 75,13  | 83  | 55  |     | 95 | 105 | 14 |
| 900-010-0032  | 32 8M 85  | 2F  | St | 32  | 81,49  | 80,16  | 87  | 60  |     | 95 | 105 | 14 |
| 900-010-0034  | 34 8M 85  | 2F  | St | 34  | 86,58  | 85,21  | 91  | 66  |     | 95 | 105 | 14 |
| 900-010-0036  | 36 8M 85  | 2F  | St | 36  | 91,67  | 90,30  | 98  | 70  |     | 95 | 105 | 14 |
| 900-010-0038  | 38 8M 85  | 2F  | St | 38  | 96,77  | 95,39  | 103 | 75  |     | 95 | 105 | 14 |
| 900-010-0040  | 40 8M 85  | 2F  | St | 40  | 101,86 | 100,49 | 106 | 75  |     | 95 | 105 | 14 |
| 900-010-0044  | 44 8M 85  | 2F  | St | 44  | 112,05 | 110,67 | 119 | 75  |     | 95 | 105 | 14 |
| 900-010-0048  | 48 8M 85  | 2F  | St | 48  | 122,23 | 120,86 | 127 | 75  |     | 95 | 105 | 14 |
| 900-010-0056  | 56 8M 85  | 2F  | St | 56  | 142,60 | 141,23 | 148 | 80  |     | 95 | 105 | 18 |
| 900-010-0064  | 64 8M 85  | 7F  | St | 64  | 162,97 | 161,60 | 168 | 100 | 137 | 95 | 95  | 18 |
| 900-010-0072  | 72 8M 85  | 7F  | St | 72  | 183,35 | 181,97 | 192 | 110 | 158 | 95 | 95  | 18 |
| 900-010-0080  | 80 8M 85  | 8   | GG | 80  | 203,72 | 202,35 |     | 110 | 180 | 95 | 95  | 20 |
| 900-010-0090  | 90 8M 85  | 8   | GG | 90  | 229,18 | 227,81 |     | 110 | 204 | 95 | 95  | 20 |
| 900-010-0112  | 112 8M 85 | 8   | GG | 112 | 285,21 | 283,83 |     | 110 | 254 | 95 | 95  | 24 |
| 900-010-0144  | 144 8M 85 | 8   | GG | 144 | 366,69 | 365,32 |     | 110 | 341 | 95 | 95  | 24 |
| 900-010-0168  | 168 8M 85 | 8   | GG | 168 | 427,81 | 426,44 |     | 120 | 400 | 95 | 95  | 24 |
| 900-010-0192  | 192 8M 85 | 8   | GG | 192 | 488,92 | 487,55 |     | 130 | 460 | 95 | 95  | 24 |

### Bezeichnung: HTD 14M

Teilung: **14 mm**  
Für Zahnriemenbreite: **40 mm**

Werkstoff (WS): St=Stahl  
GG=Grauguss

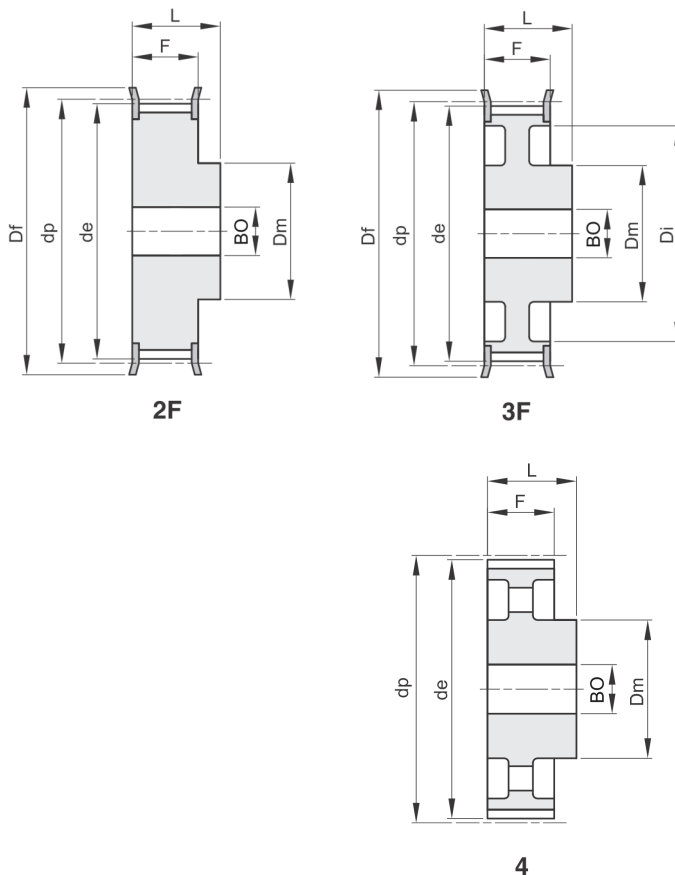


| Bestellnummer | Code       | Typ | WS | ZZ  | dp     | de     | Df  | Dm  | Di  | F  | L  | BO |
|---------------|------------|-----|----|-----|--------|--------|-----|-----|-----|----|----|----|
| 900-011-0028  | 28 14M 40  | 2F  | St | 28  | 124,78 | 122,12 | 127 | 100 |     | 54 | 69 | 24 |
| 900-011-0030  | 30 14M 40  | 2F  | St | 30  | 133,69 | 130,99 | 138 | 100 |     | 54 | 69 | 24 |
| 900-011-0032  | 32 14M 40  | 2F  | St | 32  | 142,60 | 139,88 | 154 | 100 |     | 54 | 69 | 24 |
| 900-011-0034  | 34 14M 40  | 2F  | St | 34  | 151,52 | 148,79 | 160 | 100 |     | 54 | 69 | 24 |
| 900-011-0036  | 36 14M 40  | 2F  | St | 36  | 160,43 | 157,68 | 168 | 100 |     | 54 | 69 | 24 |
| 900-011-0038  | 38 14M 40  | 2F  | St | 38  | 169,34 | 166,60 | 183 | 120 |     | 54 | 69 | 24 |
| 900-011-0040  | 40 14M 40  | 2F  | St | 40  | 178,25 | 175,49 | 188 | 120 |     | 54 | 69 | 24 |
| 900-011-0044  | 44 14M 40  | 2F  | St | 44  | 196,08 | 193,28 | 211 | 120 |     | 54 | 69 | 24 |
| 900-011-0048  | 48 14M 40  | 3F  | GG | 48  | 213,90 | 211,11 | 226 | 135 | 170 | 54 | 69 | 24 |
| 900-011-0056  | 56 14M 40  | 3F  | GG | 56  | 249,55 | 246,76 | 256 | 135 | 207 | 54 | 69 | 28 |
| 900-011-0064  | 64 14M 40  | 3F  | GG | 64  | 285,21 | 282,41 | 296 | 135 | 240 | 54 | 69 | 28 |
| 900-011-0072  | 72 14M 40  | 4   | GG | 72  | 320,86 | 318,06 |     | 135 | 278 | 54 | 69 | 28 |
| 900-011-0080  | 80 14M 40  | 4   | GG | 80  | 356,51 | 353,71 |     | 135 | 314 | 54 | 69 | 28 |
| 900-011-0090  | 90 14M 40  | 4   | GG | 90  | 401,07 | 398,28 |     | 135 | 358 | 54 | 69 | 28 |
| 900-011-0112  | 112 14M 40 | 4   | GG | 112 | 499,11 | 496,32 |     | 135 | 456 | 54 | 69 | 28 |
| 900-011-0144  | 144 14M 40 | 4   | GG | 144 | 641,71 | 638,92 |     | 135 | 600 | 54 | 69 | 28 |
| 900-011-0168  | 168 14M 40 | 4   | GG | 168 | 748,66 | 745,87 |     | 135 | 706 | 54 | 69 | 28 |
| 900-011-0192  | 192 14M 40 | 4   | GG | 192 | 855,62 | 852,82 |     | 135 | 813 | 54 | 69 | 28 |

## Bezeichnung: HTD 14M

Teilung: **14 mm**  
Für Zahnriemenbreite: **55 mm**

Werkstoff (WS): St=Stahl  
GG=Grauguss

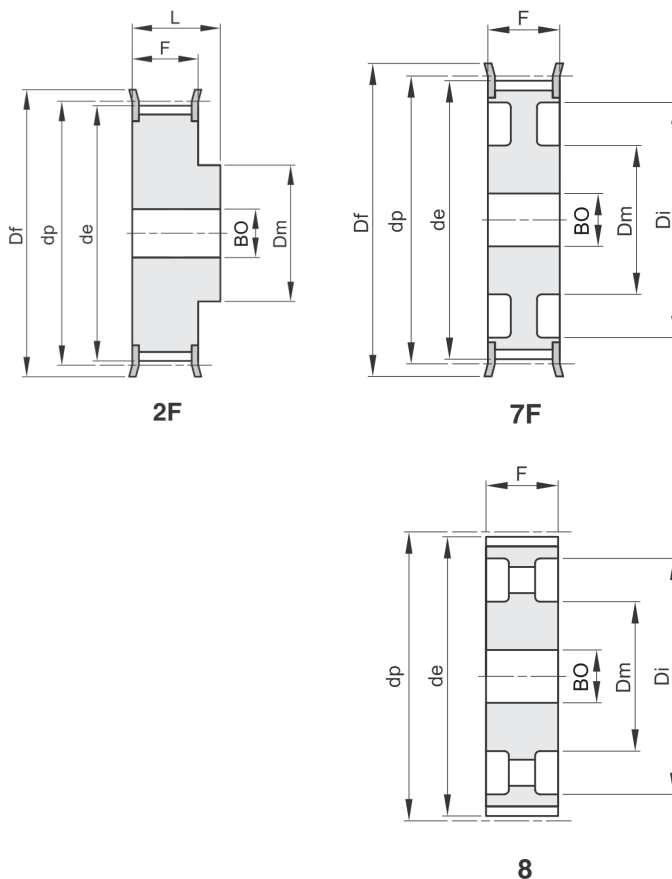


| Bestellnummer | Code       | Typ | WS | ZZ  | dp     | de     | Df  | Dm  | Di  | F  | L  | BO |
|---------------|------------|-----|----|-----|--------|--------|-----|-----|-----|----|----|----|
| 900-012-0028  | 28 14M 55  | 2F  | St | 28  | 124,78 | 122,12 | 127 | 100 |     | 70 | 85 | 24 |
| 900-012-0030  | 30 14M 55  | 2F  | St | 30  | 133,69 | 130,99 | 138 | 100 |     | 70 | 85 | 24 |
| 900-012-0032  | 32 14M 55  | 2F  | St | 32  | 142,60 | 139,88 | 154 | 100 |     | 70 | 85 | 24 |
| 900-012-0034  | 34 14M 55  | 2F  | St | 34  | 151,52 | 148,79 | 160 | 100 |     | 70 | 85 | 24 |
| 900-012-0036  | 36 14M 55  | 2F  | St | 36  | 160,43 | 157,68 | 168 | 100 |     | 70 | 85 | 24 |
| 900-012-0038  | 38 14M 55  | 2F  | St | 38  | 169,34 | 166,60 | 183 | 120 |     | 70 | 85 | 24 |
| 900-012-0040  | 40 14M 55  | 2F  | St | 40  | 178,25 | 175,49 | 188 | 120 |     | 70 | 85 | 24 |
| 900-012-0044  | 44 14M 55  | 2F  | St | 44  | 196,08 | 193,28 | 211 | 120 |     | 70 | 85 | 24 |
| 900-012-0048  | 48 14M 55  | 7F  | GG | 48  | 213,90 | 211,11 | 226 | 135 | 170 | 70 | 70 | 24 |
| 900-012-0056  | 56 14M 55  | 7F  | GG | 56  | 249,55 | 246,76 | 256 | 135 | 207 | 70 | 70 | 28 |
| 900-012-0064  | 64 14M 55  | 7F  | GG | 64  | 285,21 | 282,41 | 296 | 135 | 240 | 70 | 70 | 28 |
| 900-012-0072  | 72 14M 55  | 8   | GG | 72  | 320,86 | 318,06 |     | 135 | 278 | 70 | 70 | 28 |
| 900-012-0080  | 80 14M 55  | 8   | GG | 80  | 356,51 | 353,71 |     | 135 | 314 | 70 | 70 | 28 |
| 900-012-0090  | 90 14M 55  | 8   | GG | 90  | 401,07 | 398,28 |     | 135 | 358 | 70 | 70 | 28 |
| 900-012-0112  | 112 14M 55 | 8   | GG | 112 | 499,11 | 496,32 |     | 135 | 456 | 70 | 70 | 28 |
| 900-012-0144  | 144 14M 55 | 8   | GG | 144 | 641,71 | 638,92 |     | 135 | 600 | 70 | 70 | 28 |
| 900-012-0168  | 168 14M 55 | 8   | GG | 168 | 748,66 | 745,87 |     | 135 | 706 | 70 | 70 | 28 |
| 900-012-0192  | 192 14M 55 | 8   | GG | 192 | 855,62 | 852,82 |     | 135 | 813 | 70 | 70 | 28 |

### Bezeichnung: HTD 14M

Teilung: **14 mm**  
Für Zahnriemenbreite: **85 mm**

Werkstoff (WS): St=Stahl  
GG=Grauguss

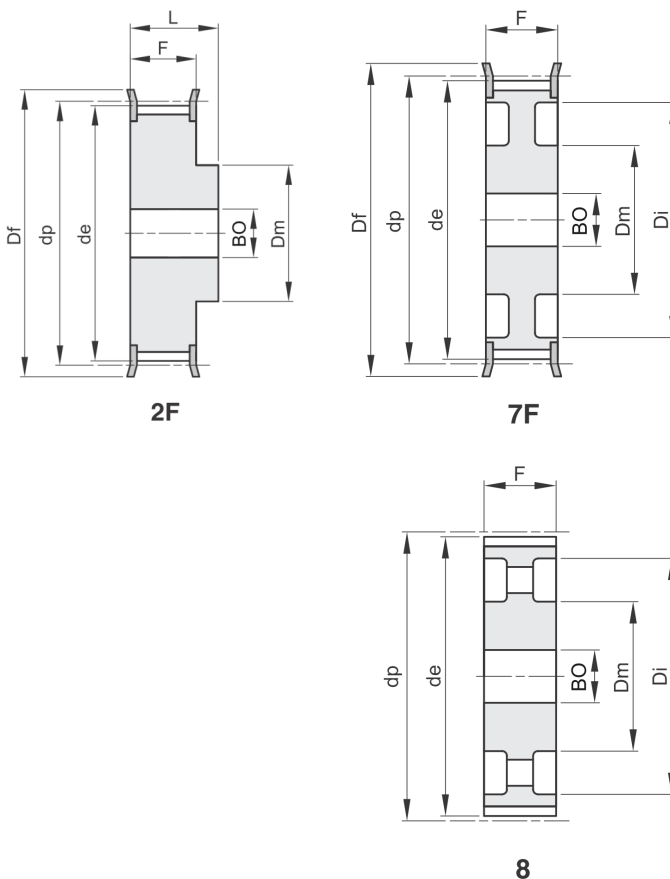


| Bestellnummer | Code       | Typ | WS | ZZ  | dp     | de     | Df  | Dm  | Di  | F   | L   | BO |
|---------------|------------|-----|----|-----|--------|--------|-----|-----|-----|-----|-----|----|
| 900-013-0028  | 28 14M 85  | 2F  | St | 28  | 124,78 | 122,12 | 127 | 100 |     | 102 | 117 | 24 |
| 900-013-0030  | 30 14M 85  | 2F  | St | 30  | 133,69 | 130,99 | 138 | 100 |     | 102 | 117 | 24 |
| 900-013-0032  | 32 14M 85  | 2F  | St | 32  | 142,60 | 139,88 | 154 | 100 |     | 102 | 117 | 24 |
| 900-013-0034  | 34 14M 85  | 2F  | St | 34  | 151,52 | 148,79 | 160 | 100 |     | 102 | 117 | 24 |
| 900-013-0036  | 36 14M 85  | 2F  | St | 36  | 160,43 | 157,68 | 168 | 100 |     | 102 | 117 | 32 |
| 900-013-0038  | 38 14M 85  | 2F  | St | 38  | 169,34 | 166,60 | 183 | 120 |     | 102 | 117 | 32 |
| 900-013-0040  | 40 14M 85  | 2F  | St | 40  | 178,25 | 175,49 | 188 | 135 |     | 102 | 117 | 32 |
| 900-013-0044  | 44 14M 85  | 2F  | St | 44  | 196,08 | 193,28 | 211 | 135 |     | 102 | 117 | 32 |
| 900-013-0048  | 48 14M 85  | 2F  | St | 48  | 213,90 | 211,11 | 226 | 150 |     | 102 | 117 | 32 |
| 900-013-0056  | 56 14M 85  | 7F  | GG | 56  | 249,55 | 246,76 | 256 | 150 | 207 | 102 | 102 | 32 |
| 900-013-0064  | 64 14M 85  | 7F  | GG | 64  | 285,21 | 282,41 | 296 | 150 | 240 | 102 | 102 | 32 |
| 900-013-0072  | 72 14M 85  | 8   | GG | 72  | 320,86 | 318,06 |     | 150 | 278 | 102 | 102 | 32 |
| 900-013-0080  | 80 14M 85  | 8   | GG | 80  | 356,51 | 353,71 |     | 150 | 314 | 102 | 102 | 32 |
| 900-013-0090  | 90 14M 85  | 8   | GG | 90  | 401,07 | 398,28 |     | 150 | 358 | 102 | 102 | 32 |
| 900-013-0112  | 112 14M 85 | 8   | GG | 112 | 499,11 | 496,32 |     | 150 | 456 | 102 | 102 | 32 |
| 900-013-0144  | 144 14M 85 | 8   | GG | 144 | 641,71 | 638,92 |     | 150 | 600 | 102 | 102 | 32 |
| 900-013-0168  | 168 14M 85 | 8   | GG | 168 | 748,66 | 745,87 |     | 150 | 706 | 102 | 102 | 32 |
| 900-013-0192  | 192 14M 85 | 8   | GG | 192 | 855,62 | 852,82 |     | 165 | 813 | 102 | 102 | 32 |

## Bezeichnung: HTD 14M

Teilung: **14 mm**  
Für Zahnriemenbreite: **115 mm**

Werkstoff (WS):  
St=Stahl  
GG=Grauguss

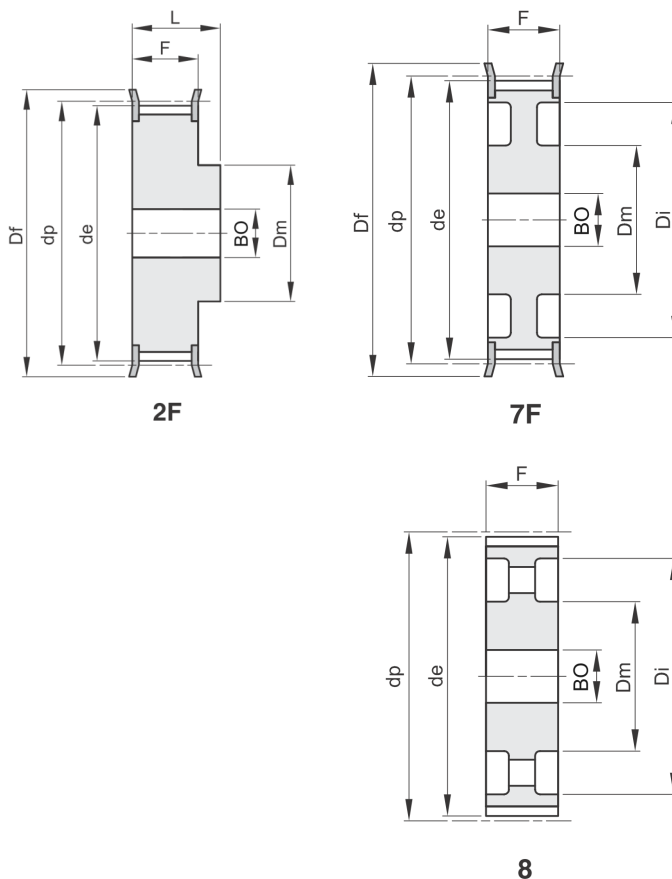


| Bestellnummer | Code        | Typ | WS | ZZ  | dp     | de     | Df  | Dm  | Di  | F   | L   | BO |
|---------------|-------------|-----|----|-----|--------|--------|-----|-----|-----|-----|-----|----|
| 900-014-0028  | 28 14M 115  | 2F  | St | 28  | 124,78 | 122,12 | 127 | 100 |     | 133 | 148 | 32 |
| 900-014-0030  | 30 14M 115  | 2F  | St | 30  | 133,69 | 130,99 | 138 | 100 |     | 133 | 148 | 32 |
| 900-014-0032  | 32 14M 115  | 2F  | St | 32  | 142,60 | 139,88 | 154 | 100 |     | 133 | 148 | 32 |
| 900-014-0034  | 34 14M 115  | 2F  | St | 34  | 151,52 | 148,79 | 160 | 100 |     | 133 | 148 | 32 |
| 900-014-0036  | 36 14M 115  | 2F  | St | 36  | 160,43 | 157,68 | 168 | 120 |     | 133 | 148 | 32 |
| 900-014-0038  | 38 14M 115  | 2F  | St | 38  | 169,34 | 166,60 | 183 | 120 |     | 133 | 148 | 32 |
| 900-014-0040  | 40 14M 115  | 2F  | St | 40  | 178,25 | 175,49 | 188 | 135 |     | 133 | 148 | 32 |
| 900-014-0044  | 44 14M 115  | 2F  | St | 44  | 196,08 | 193,28 | 211 | 140 |     | 133 | 148 | 32 |
| 900-014-0048  | 48 14M 115  | 2F  | St | 48  | 213,90 | 211,11 | 226 | 150 |     | 133 | 148 | 32 |
| 900-014-0056  | 56 14M 115  | 2F  | St | 56  | 249,55 | 246,76 | 256 | 150 |     | 133 | 148 | 32 |
| 900-014-0064  | 64 14M 115  | 7F  | GG | 64  | 285,21 | 282,41 | 296 | 150 | 240 | 133 | 133 | 32 |
| 900-014-0072  | 72 14M 115  | 8   | GG | 72  | 320,86 | 318,06 |     | 150 | 278 | 133 | 133 | 32 |
| 900-014-0080  | 80 14M 115  | 8   | GG | 80  | 356,51 | 353,71 |     | 150 | 314 | 133 | 133 | 32 |
| 900-014-0090  | 90 14M 115  | 8   | GG | 90  | 401,07 | 398,28 |     | 150 | 358 | 133 | 133 | 32 |
| 900-014-0112  | 112 14M 115 | 8   | GG | 112 | 499,11 | 496,32 |     | 150 | 456 | 133 | 133 | 32 |
| 900-014-0144  | 144 14M 115 | 8   | GG | 144 | 641,71 | 638,92 |     | 165 | 600 | 133 | 133 | 32 |
| 900-014-0168  | 168 14M 115 | 8   | GG | 168 | 748,66 | 745,87 |     | 165 | 706 | 133 | 133 | 32 |
| 900-014-0192  | 192 14M 115 | 8   | GG | 192 | 855,62 | 852,82 |     | 165 | 813 | 133 | 133 | 32 |


### Bezeichnung: HTD 14M

Teilung: **14 mm**  
Für Zahnriemenbreite: **170 mm**


Werkstoff (WS): St=Stahl  
GG=Grauguss

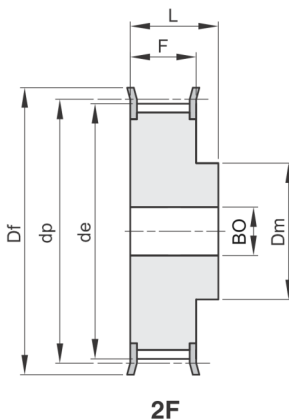

2F

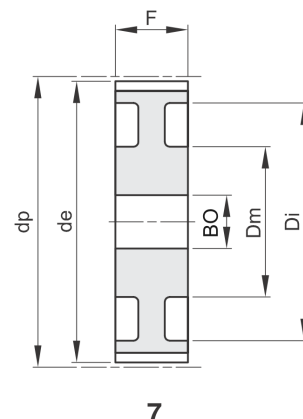

7

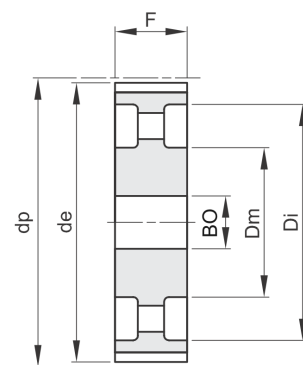

8


| Bestellnummer | Code        | Typ | WS | ZZ  | dp     | de     | Df  | Dm  | Di  | F   | L   | BO |
|---------------|-------------|-----|----|-----|--------|--------|-----|-----|-----|-----|-----|----|
| 900-015-0028  | 28 14M 170  | 2F  | St | 28  | 124,78 | 122,12 | 127 | 100 |     | 187 | 202 | 32 |
| 900-015-0030  | 30 14M 170  | 2F  | St | 30  | 133,69 | 130,99 | 138 | 100 |     | 187 | 202 | 32 |
| 900-015-0032  | 32 14M 170  | 2F  | St | 32  | 142,60 | 139,88 | 154 | 100 |     | 187 | 202 | 32 |
| 900-015-0034  | 34 14M 170  | 2F  | St | 34  | 151,52 | 148,79 | 160 | 100 |     | 187 | 202 | 32 |
| 900-015-0036  | 36 14M 170  | 2F  | St | 36  | 160,43 | 157,68 | 168 | 120 |     | 187 | 202 | 32 |
| 900-015-0038  | 38 14M 170  | 2F  | St | 38  | 169,34 | 166,60 | 183 | 135 |     | 187 | 202 | 32 |
| 900-015-0040  | 40 14M 170  | 2F  | St | 40  | 178,25 | 175,49 | 188 | 140 |     | 187 | 202 | 32 |
| 900-015-0044  | 44 14M 170  | 2F  | St | 44  | 196,08 | 193,28 | 211 | 160 |     | 187 | 202 | 32 |
| 900-015-0048  | 48 14M 170  | 2F  | St | 48  | 213,90 | 211,11 | 226 | 160 |     | 187 | 202 | 32 |
| 900-015-0056  | 56 14M 170  | 2F  | St | 56  | 249,55 | 246,76 | 256 | 160 |     | 187 | 202 | 32 |
| 900-015-0064  | 64 14M 170  | 2F  | St | 64  | 285,21 | 282,41 | 296 | 180 |     | 187 | 202 | 32 |
| 900-015-0072  | 72 14M 170  | 7   | GG | 72  | 320,86 | 318,06 |     | 180 | 278 | 187 | 187 | 32 |
| 900-015-0080  | 80 14M 170  | 7   | GG | 80  | 356,51 | 353,71 |     | 180 | 314 | 187 | 187 | 32 |
| 900-015-0090  | 90 14M 170  | 8   | GG | 90  | 401,07 | 398,28 |     | 180 | 358 | 187 | 187 | 38 |
| 900-015-0112  | 112 14M 170 | 8   | GG | 112 | 499,11 | 496,32 |     | 200 | 456 | 187 | 187 | 38 |
| 900-015-0144  | 144 14M 170 | 8   | GG | 144 | 641,71 | 638,92 |     | 220 | 600 | 187 | 187 | 38 |
| 900-015-0168  | 168 14M 170 | 8   | GG | 168 | 748,66 | 745,87 |     | 220 | 706 | 187 | 187 | 38 |
| 900-015-0192  | 192 14M 170 | 8   | GG | 192 | 855,62 | 852,82 |     | 220 | 813 | 187 | 187 | 38 |

**Bezeichnung: HTD 5M**  
für Taperbuchsen

Teilung: **5 mm**  
Für Zahnriemenbreite: **15 mm**


Werkstoff (WS): **St=Stahl**

Passenden Spannbuchsen (SBT=Spannbuchsentyp)  
erhalten Sie ebenfalls von HolTech!

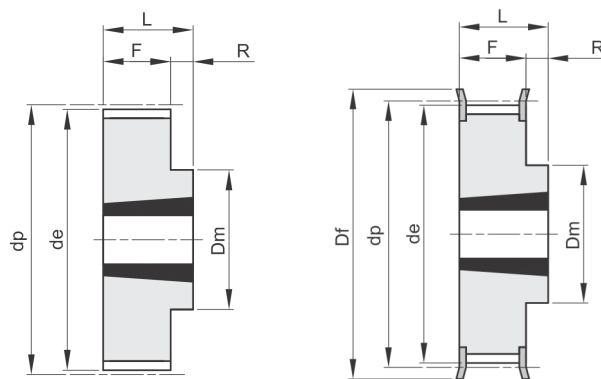

**10**

**10F**

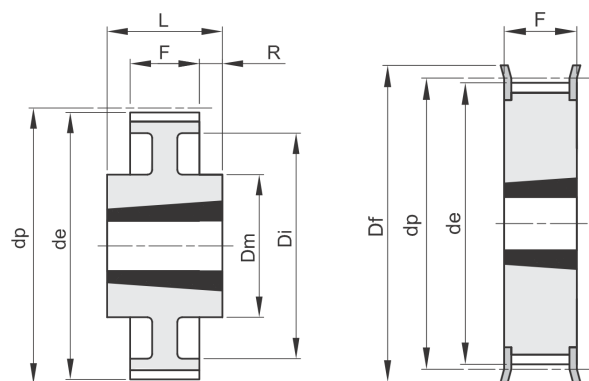

**13**

**15F**


| Bestellnummer | Code         | Typ | WS | ZZ  | SBT  | B-max. | dp     | de     | DF  | Dm  | Di  | F  | L  | R  |
|---------------|--------------|-----|----|-----|------|--------|--------|--------|-----|-----|-----|----|----|----|
| 901-005-0034  | TL 34 5M 15  | 15F | St | 34  | 1008 | 25     | 54,11  | 52,97  | 57  |     |     | 22 | 22 |    |
| 901-005-0036  | TL 36 5M 15  | 15F | St | 36  | 1108 | 25     | 57,30  | 56,15  | 60  |     |     | 22 | 22 |    |
| 901-005-0038  | TL 38 5M 15  | 15F | St | 38  | 1108 | 25     | 60,48  | 59,34  | 66  |     |     | 22 | 22 |    |
| 901-005-0040  | TL 40 5M 15  | 15F | St | 40  | 1108 | 25     | 63,66  | 62,52  | 71  |     |     | 22 | 22 |    |
| 901-005-0044  | TL 44 5M 15  | 15F | St | 44  | 1108 | 25     | 70,03  | 68,89  | 75  |     |     | 22 | 22 |    |
| 901-005-0048  | TL 48 5M 15  | 10F | St | 48  | 1210 | 32     | 76,39  | 75,25  | 83  | 59  |     | 22 | 25 | 3  |
| 901-005-0056  | TL 56 5M 15  | 10F | St | 56  | 1210 | 32     | 89,13  | 87,99  | 93  | 70  |     | 22 | 25 | 3  |
| 901-005-0064  | TL 64 5M 15  | 10F | St | 64  | 1210 | 32     | 101,86 | 100,72 | 106 | 80  |     | 22 | 25 | 3  |
| 901-005-0072  | TL 72 5M 15  | 10  | St | 72  | 1610 | 42     | 114,59 | 113,45 |     | 92  |     | 22 | 25 | 3  |
| 901-005-0080  | TL 80 5M 15  | 10  | St | 80  | 1610 | 42     | 127,32 | 126,18 |     | 92  |     | 22 | 25 | 3  |
| 901-005-0090  | TL 90 5M 15  | 10  | St | 90  | 1610 | 42     | 143,24 | 142,10 |     | 92  |     | 22 | 25 | 3  |
| 901-005-0112  | TL 112 5M 15 | 10  | St | 112 | 2012 | 50     | 178,25 | 177,11 |     | 110 |     | 20 | 32 | 12 |
| 901-005-0136  | TL 136 5M 15 | 13  | St | 136 | 2012 | 50     | 216,45 | 215,31 |     | 110 | 199 | 20 | 32 | 6  |

### Bezeichnung: HTD 8M für Taperbuchsen

Teilung: **8 mm**  
Für Zahnriemenbreite: **20 mm**

Werkstoff (WS): St=Stahl  
GG=Grauguss

Passenden Spannbuchsen (SBT=Spannbuchsentyp)  
erhalten Sie ebenfalls von HolTech!

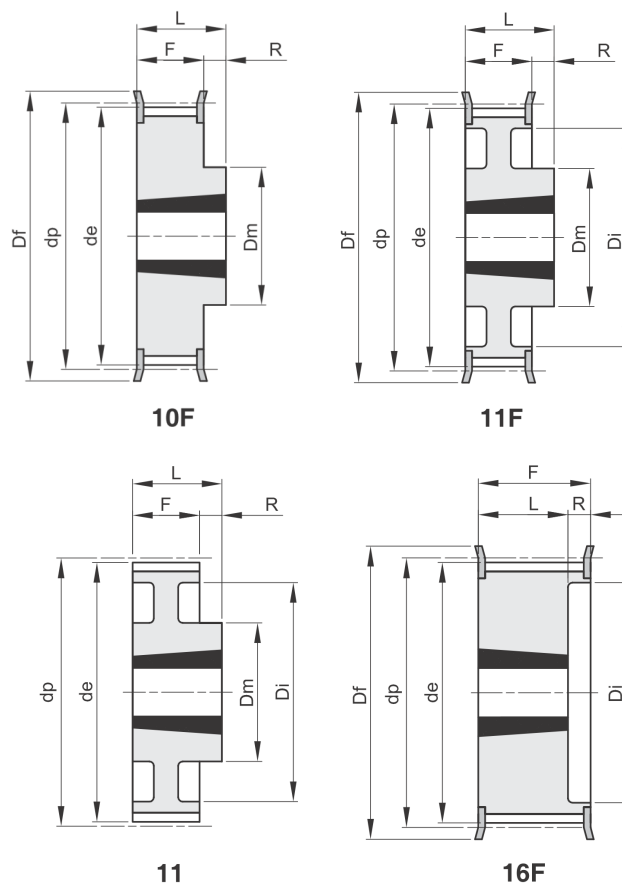


| Bestellnummer | Code        | Typ | WS | ZZ | SBT  | B-max. | dp     | de     | DF  | Dm  | Di  | F  | L  | R |
|---------------|-------------|-----|----|----|------|--------|--------|--------|-----|-----|-----|----|----|---|
| 901-007-0022  | TL 22 8M 20 | 16F | St | 22 | 1008 | 25     | 56,02  | 54,65  | 60  |     | 37  | 28 | 22 | 6 |
| 901-007-0024  | TL 24 8M 20 | 16F | St | 24 | 1108 | 25     | 61,11  | 59,74  | 66  |     | 44  | 28 | 22 | 6 |
| 901-007-0026  | TL 26 8M 20 | 16F | St | 26 | 1108 | 25     | 66,21  | 64,84  | 71  |     | 45  | 28 | 22 | 6 |
| 901-007-0028  | TL 28 8M 20 | 16F | St | 28 | 1108 | 25     | 71,30  | 70,08  | 75  |     | 50  | 28 | 22 | 6 |
| 901-007-0030  | TL 30 8M 20 | 16F | St | 30 | 1108 | 25     | 76,39  | 75,13  | 83  |     | 58  | 28 | 22 | 6 |
| 901-007-0032  | TL 32 8M 20 | 16F | St | 32 | 1610 | 42     | 81,49  | 80,16  | 87  |     | 63  | 28 | 25 | 3 |
| 901-007-0034  | TL 34 8M 20 | 16F | St | 34 | 1610 | 42     | 86,58  | 85,21  | 91  |     | 64  | 28 | 25 | 3 |
| 901-007-0036  | TL 36 8M 20 | 16F | St | 36 | 1610 | 42     | 91,67  | 90,30  | 98  |     | 68  | 28 | 25 | 3 |
| 901-007-0038  | TL 38 8M 20 | 16F | St | 38 | 1610 | 42     | 96,77  | 95,39  | 103 |     | 72  | 28 | 25 | 3 |
| 901-007-0040  | TL 40 8M 20 | 16F | St | 40 | 1610 | 42     | 101,86 | 100,49 | 106 |     | 76  | 28 | 25 | 3 |
| 901-007-0044  | TL 44 8M 20 | 10F | St | 44 | 2012 | 50     | 112,05 | 110,67 | 119 | 92  |     | 28 | 32 | 4 |
| 901-007-0048  | TL 48 8M 20 | 10F | St | 48 | 2012 | 50     | 122,23 | 120,86 | 127 | 96  |     | 28 | 32 | 4 |
| 901-007-0056  | TL 56 8M 20 | 10F | St | 56 | 2012 | 50     | 142,60 | 141,23 | 148 | 110 |     | 28 | 32 | 4 |
| 901-007-0064  | TL 64 8M 20 | 11F | St | 64 | 2012 | 50     | 162,97 | 161,60 | 168 | 110 | 137 | 28 | 32 | 4 |
| 901-007-0072  | TL 72 8M 20 | 11F | St | 72 | 2012 | 50     | 183,35 | 181,97 | 192 | 110 | 158 | 28 | 32 | 4 |
| 901-007-0080  | TL 80 8M 20 | 11  | GG | 80 | 2012 | 50     | 203,72 | 202,35 |     | 110 | 180 | 28 | 32 | 4 |
| 901-007-0090  | TL 90 8M 20 | 11  | GG | 90 | 2012 | 50     | 229,18 | 227,81 |     | 110 | 204 | 28 | 32 | 4 |

**Bezeichnung: HTD 8M**  
für Taperbuchsen

Teilung: **8 mm**  
Für Zahnriemenbreite: **30 mm**

Werkstoff (WS): **St=Stahl**  
**GG=Grauguss**

Passenden Spannbuchsen (SBT=Spannbuchsentyp)  
erhalten Sie ebenfalls von HolTech!

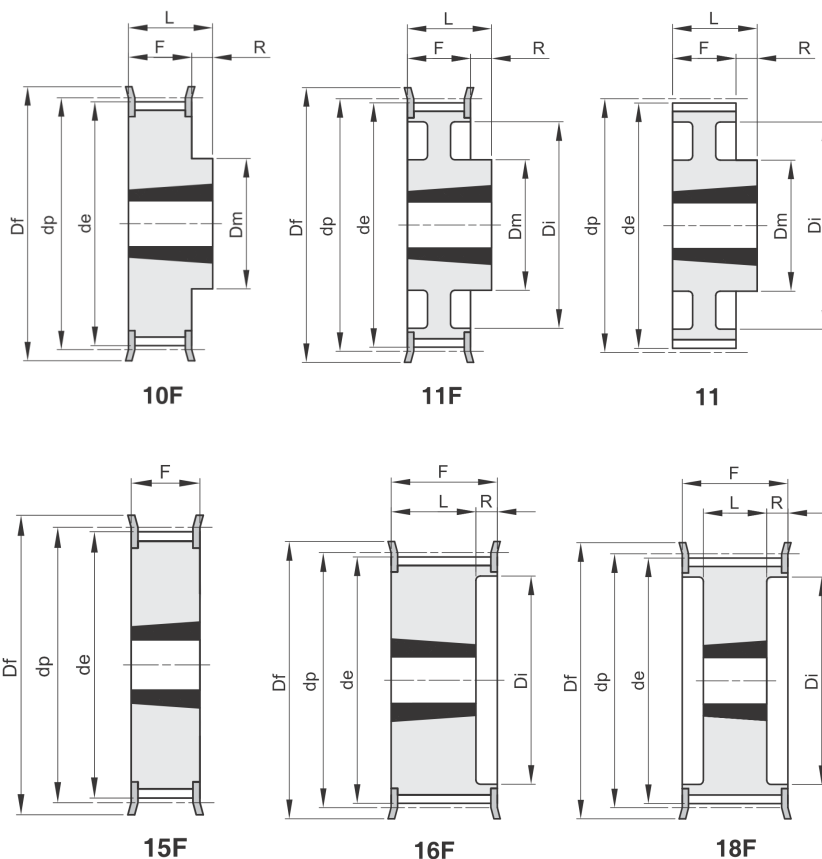



| Bestellnummer | Code         | Typ | WS | ZZ  | SBT  | B-max. | dp     | de     | DF  | Dm  | Di  | F  | L  | R  |
|---------------|--------------|-----|----|-----|------|--------|--------|--------|-----|-----|-----|----|----|----|
| 901-008-0022  | TL 22 8M 30  | 16F | St | 22  | 1008 | 25     | 56,02  | 54,65  | 60  |     | 37  | 38 | 22 | 16 |
| 901-008-0024  | TL 24 8M 30  | 16F | St | 24  | 1108 | 25     | 61,11  | 59,74  | 66  |     | 44  | 38 | 22 | 16 |
| 901-008-0026  | TL 26 8M 30  | 16F | St | 26  | 1108 | 25     | 66,21  | 64,84  | 71  |     | 44  | 38 | 22 | 16 |
| 901-008-0028  | TL 28 8M 30  | 16F | St | 28  | 1210 | 32     | 71,30  | 70,08  | 75  |     | 50  | 38 | 25 | 13 |
| 901-008-0030  | TL 30 8M 30  | 15F | St | 30  | 1615 | 42     | 76,39  | 75,13  | 83  |     |     | 38 | 38 |    |
| 901-008-0032  | TL 32 8M 30  | 15F | St | 32  | 1615 | 42     | 81,49  | 80,16  | 87  |     |     | 38 | 38 |    |
| 901-008-0034  | TL 34 8M 30  | 15F | St | 34  | 1615 | 42     | 86,58  | 85,21  | 91  |     |     | 38 | 38 |    |
| 901-008-0036  | TL 36 8M 30  | 15F | St | 36  | 1615 | 42     | 91,67  | 90,30  | 98  |     |     | 38 | 38 |    |
| 901-008-0038  | TL 38 8M 30  | 15F | St | 38  | 1615 | 42     | 96,77  | 95,39  | 103 |     |     | 38 | 38 |    |
| 901-008-0040  | TL 40 8M 30  | 15F | St | 40  | 1615 | 42     | 101,86 | 100,49 | 106 |     |     | 38 | 38 |    |
| 901-008-0044  | TL 44 8M 30  | 18F | St | 44  | 2012 | 50     | 112,05 | 110,67 | 119 |     | 86  | 38 | 32 | 3  |
| 901-008-0048  | TL 48 8M 30  | 18F | St | 48  | 2012 | 50     | 122,23 | 120,86 | 127 |     | 90  | 38 | 32 | 3  |
| 901-008-0056  | TL 56 8M 30  | 18F | St | 56  | 2012 | 50     | 142,60 | 141,23 | 148 |     | 110 | 38 | 32 | 3  |
| 901-008-0064  | TL 64 8M 30  | 10F | St | 64  | 2517 | 60     | 162,97 | 161,60 | 168 | 125 |     | 38 | 45 | 7  |
| 901-008-0072  | TL 72 8M 30  | 11F | St | 72  | 2517 | 60     | 183,35 | 181,97 | 192 | 125 | 158 | 38 | 45 | 7  |
| 901-008-0080  | TL 80 8M 30  | 11  | GG | 80  | 2517 | 60     | 203,72 | 202,35 |     | 125 | 180 | 38 | 45 | 7  |
| 901-008-0090  | TL 90 8M 30  | 11  | GG | 90  | 2517 | 60     | 229,18 | 227,81 |     | 125 | 204 | 38 | 45 | 7  |
| 901-008-0112  | TL 112 8M 30 | 12  | GG | 112 | 2517 | 60     | 285,21 | 283,83 |     | 125 | 254 | 38 | 45 | 7  |
| 901-008-0144  | TL 144 8M 30 | 12  | GG | 144 | 2517 | 60     | 366,69 | 365,32 |     | 125 | 336 | 38 | 45 | 7  |

### Bezeichnung: HTD 8M für Taperbuchsen

Teilung: **8 mm**  
Für Zahnriemenbreite: **50 mm**

Werkstoff (WS): **St=Stahl**  
**GG=Grauguss**

Passenden Spannbuchsen (SBT=Spannbuchsentyp)  
erhalten Sie ebenfalls von HolTech!

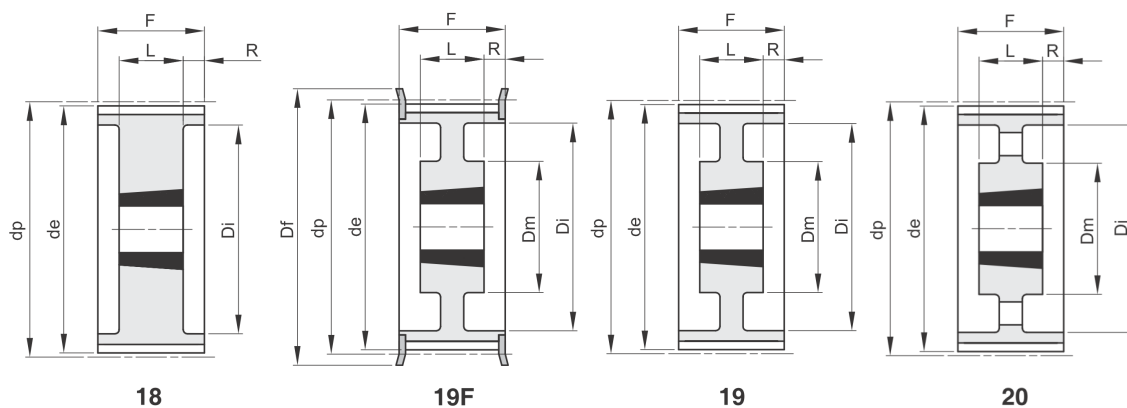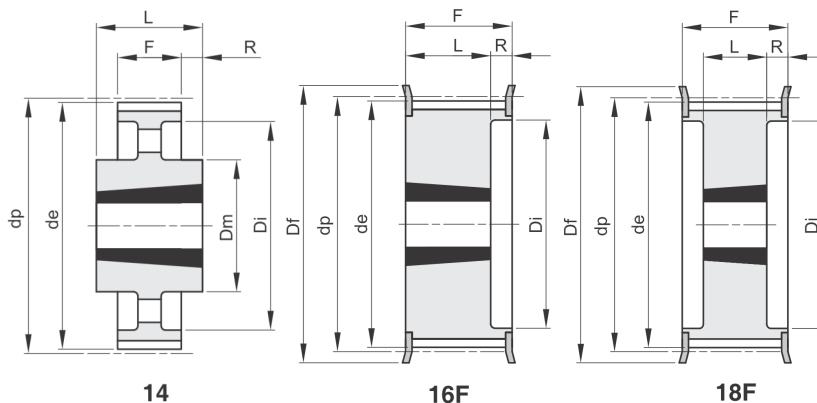


| Bestellnummer | Code         | Typ | WS | ZZ  | SBT  | B-max. | dp     | de     | DF  | Dm  | Di  | F  | L  | R    |
|---------------|--------------|-----|----|-----|------|--------|--------|--------|-----|-----|-----|----|----|------|
| 901-009-0028  | TL 28 8M 50  | 16F | St | 28  | 1210 | 32     | 71,30  | 70,08  | 75  |     | 50  | 60 | 25 | 35,0 |
| 901-009-0030  | TL 30 8M 50  | 16F | St | 30  | 1615 | 42     | 76,39  | 75,13  | 83  |     | 58  | 60 | 38 | 22,0 |
| 901-009-0032  | TL 32 8M 50  | 16F | St | 32  | 1615 | 42     | 81,49  | 80,16  | 87  |     | 63  | 60 | 38 | 22,0 |
| 901-009-0034  | TL 34 8M 50  | 16F | St | 34  | 1615 | 42     | 86,58  | 85,21  | 91  |     | 65  | 60 | 38 | 22,0 |
| 901-009-0036  | TL 36 8M 50  | 16F | St | 36  | 1615 | 42     | 91,67  | 90,30  | 98  |     | 68  | 60 | 38 | 22,0 |
| 901-009-0038  | TL 38 8M 50  | 16F | St | 38  | 1615 | 42     | 96,77  | 95,39  | 103 |     | 72  | 60 | 38 | 22,0 |
| 901-009-0040  | TL 40 8M 50  | 18F | St | 40  | 2012 | 50     | 101,86 | 100,49 | 106 |     | 80  | 60 | 32 | 14,0 |
| 901-009-0044  | TL 44 8M 50  | 18F | St | 44  | 2012 | 50     | 112,05 | 110,67 | 119 |     | 86  | 60 | 32 | 14,0 |
| 901-009-0048  | TL 48 8M 50  | 18F | St | 48  | 2012 | 50     | 122,23 | 120,86 | 127 |     | 95  | 60 | 32 | 14,0 |
| 901-009-0056  | TL 56 8M 50  | 18F | St | 56  | 2517 | 60     | 142,60 | 141,23 | 148 |     | 116 | 60 | 45 | 7,5  |
| 901-009-0064  | TL 64 8M 50  | 18F | St | 64  | 2517 | 60     | 162,97 | 161,60 | 168 |     | 136 | 60 | 45 | 7,5  |
| 901-009-0072  | TL 72 8M 50  | 19F | St | 72  | 2517 | 60     | 183,35 | 181,97 | 192 | 125 | 158 | 60 | 45 | 7,5  |
| 901-009-0080  | TL 80 8M 50  | 18  | GG | 80  | 3020 | 75     | 203,72 | 202,35 |     |     | 180 | 60 | 51 | 4,5  |
| 901-009-0090  | TL 90 8M 50  | 19  | GG | 90  | 3020 | 75     | 229,18 | 227,81 |     | 160 | 204 | 60 | 51 | 4,5  |
| 901-009-0112  | TL 112 8M 50 | 19  | GG | 112 | 3020 | 75     | 285,21 | 283,83 |     | 170 | 254 | 60 | 51 | 4,5  |
| 901-009-0144  | TL 144 8M 50 | 20  | GG | 144 | 3020 | 75     | 366,69 | 365,32 |     | 170 | 336 | 60 | 51 | 4,5  |
| 901-009-0168  | TL 168 8M 50 | 14  | GG | 168 | 3525 | 90     | 427,81 | 426,44 |     | 198 | 395 | 60 | 65 | 2,5  |
| 901-009-0192  | TL 192 8M 50 | 14  | GG | 192 | 3525 | 90     | 488,92 | 487,55 |     | 198 | 455 | 60 | 65 | 2,5  |

**Bezeichnung: HTD 8M**  
für Taperbuchsen

Teilung: **8 mm**  
Für Zahnriemenbreite: **85 mm**

Werkstoff (WS): **St=Stahl**  
**GG=Grauguss**

Passenden Spannbuchsen (SBT=Spannbuchsentyp)  
erhalten Sie ebenfalls von HolTech!

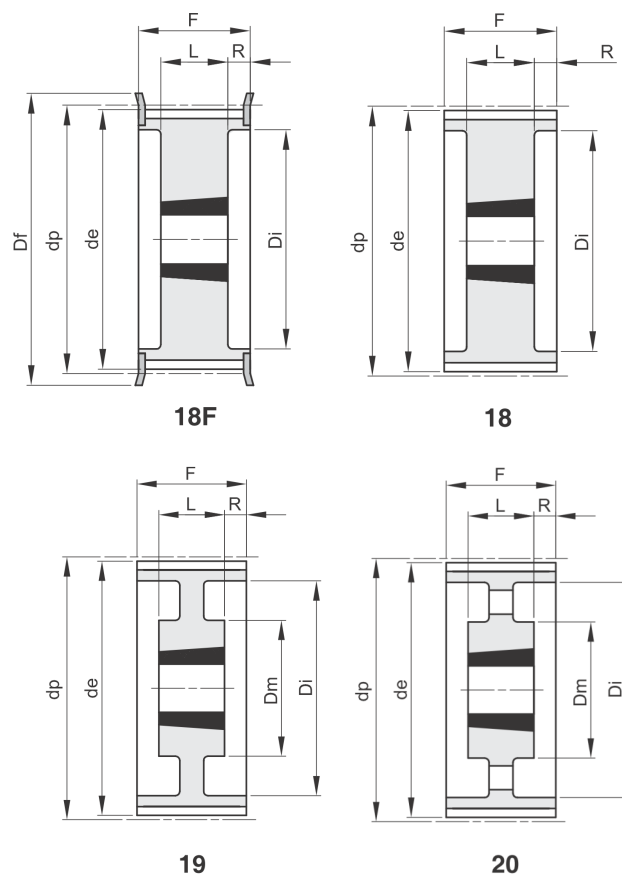


| Bestellnummer | Code         | Typ | WS | ZZ  | SBT  | B-max. | dp     | de     | DF  | Dm  | Di  | F  | L  | R    |
|---------------|--------------|-----|----|-----|------|--------|--------|--------|-----|-----|-----|----|----|------|
| 901-010-0034  | TL 34 8M 85  | 18F | St | 34  | 1615 | 42     | 86,58  | 85,22  | 91  |     | 65  | 95 | 38 | 28,5 |
| 901-010-0036  | TL 36 8M 85  | 18F | St | 36  | 1615 | 42     | 91,67  | 90,30  | 98  |     | 68  | 95 | 38 | 28,5 |
| 901-010-0038  | TL 38 8M 85  | 18F | St | 38  | 1615 | 42     | 96,77  | 95,39  | 103 |     | 72  | 95 | 38 | 28,5 |
| 901-010-0040  | TL 40 8M 85  | 18F | St | 40  | 2012 | 50     | 101,86 | 100,49 | 106 |     | 80  | 95 | 32 | 31,5 |
| 901-010-0044  | TL 44 8M 85  | 18F | St | 44  | 2012 | 50     | 112,05 | 110,67 | 119 |     | 86  | 95 | 32 | 31,5 |
| 901-010-0048  | TL 48 8M 85  | 18F | St | 48  | 2517 | 60     | 122,23 | 120,86 | 127 |     | 97  | 95 | 45 | 25,0 |
| 901-010-0056  | TL 56 8M 85  | 18F | St | 56  | 2517 | 60     | 142,60 | 141,23 | 148 |     | 116 | 95 | 45 | 25,0 |
| 901-010-0064  | TL 64 8M 85  | 18F | St | 64  | 2517 | 60     | 162,97 | 161,60 | 168 |     | 136 | 95 | 45 | 25,0 |
| 901-010-0072  | TL 72 8M 85  | 18F | St | 72  | 3020 | 75     | 183,35 | 181,97 | 192 |     | 150 | 95 | 51 | 22,0 |
| 901-010-0080  | TL 80 8M 85  | 18  | GG | 80  | 3020 | 75     | 203,72 | 202,35 |     |     | 180 | 95 | 51 | 22,0 |
| 901-010-0090  | TL 90 8M 85  | 19  | GG | 90  | 3020 | 75     | 229,18 | 227,81 |     | 170 | 204 | 95 | 51 | 22,0 |
| 901-010-0112  | TL 112 8M 85 | 19  | GG | 112 | 3020 | 75     | 285,21 | 283,83 |     | 170 | 254 | 95 | 51 | 22,0 |
| 901-010-0144  | TL 144 8M 85 | 20  | GG | 144 | 3525 | 90     | 366,69 | 365,32 |     | 198 | 336 | 95 | 65 | 15,0 |
| 901-010-0168  | TL 168 8M 85 | 20  | GG | 168 | 3525 | 90     | 427,81 | 426,44 |     | 198 | 395 | 95 | 65 | 15,0 |
| 901-010-0192  | TL 192 8M 85 | 20  | GG | 192 | 3525 | 90     | 488,92 | 487,55 |     | 198 | 455 | 95 | 65 | 15,0 |

### Bezeichnung: HTD 14M für Taperbuchsen

Teilung: **14 mm**  
Für Zahnriemenbreite: **40 mm**

Werkstoff (WS): St=Stahl  
GG=Grauguss

Passenden Spannbuchsen (SBT=Spannbuchsentyp)  
erhalten Sie ebenfalls von HolTech!

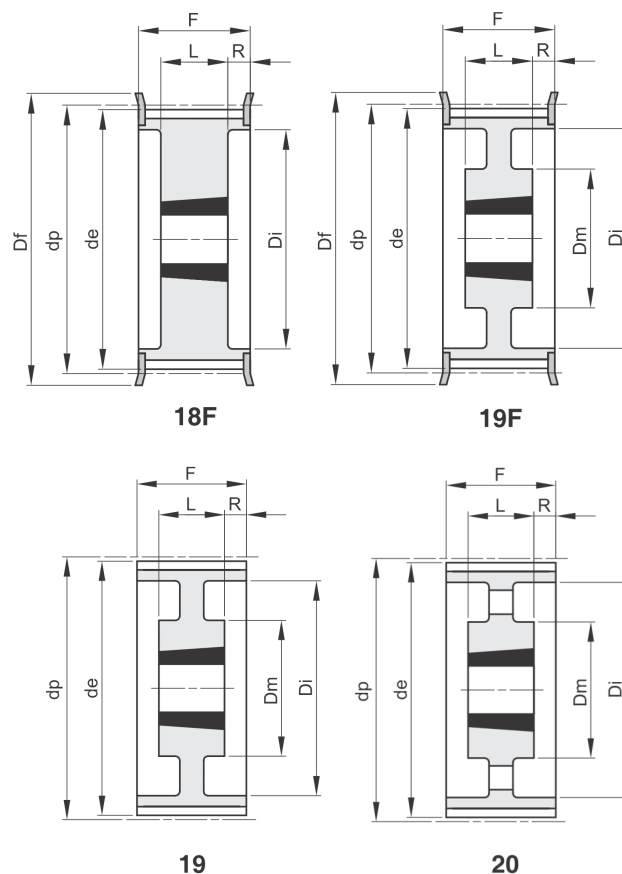


| Bestellnummer | Code          | Typ | WS | ZZ  | SBT  | B-max. | dp     | de     | DF  | Dm  | Di  | F  | L  | R    |
|---------------|---------------|-----|----|-----|------|--------|--------|--------|-----|-----|-----|----|----|------|
| 901-011-0028  | TL 28 14M 40  | 18F | St | 28  | 2012 | 50     | 124,78 | 122,12 | 127 |     | 94  | 54 | 32 | 11,0 |
| 901-011-0030  | TL 30 14M 40  | 18F | St | 30  | 2012 | 50     | 133,69 | 130,99 | 138 |     | 98  | 54 | 32 | 11,0 |
| 901-011-0032  | TL 32 14M 40  | 18F | St | 32  | 2012 | 50     | 142,60 | 139,88 | 154 |     | 108 | 54 | 32 | 11,0 |
| 901-011-0034  | TL 34 14M 40  | 18F | St | 34  | 2517 | 60     | 151,52 | 148,79 | 160 |     | 110 | 54 | 45 | 4,5  |
| 901-011-0036  | TL 36 14M 40  | 18F | St | 36  | 2517 | 60     | 160,43 | 157,68 | 168 |     | 120 | 54 | 45 | 4,5  |
| 901-011-0038  | TL 38 14M 40  | 18F | St | 38  | 2517 | 60     | 169,34 | 166,60 | 183 |     | 130 | 54 | 45 | 4,5  |
| 901-011-0040  | TL 40 14M 40  | 18F | St | 40  | 2517 | 60     | 178,25 | 175,49 | 188 |     | 138 | 54 | 45 | 4,5  |
| 901-011-0044  | TL 44 14M 40  | 18F | St | 44  | 3020 | 75     | 196,08 | 193,28 | 211 |     | 155 | 54 | 51 | 1,5  |
| 901-011-0048  | TL 48 14M 40  | 18F | St | 48  | 3020 | 75     | 213,90 | 211,11 | 226 |     | 170 | 54 | 51 | 1,5  |
| 901-011-0056  | TL 56 14M 40  | 18F | GG | 56  | 3020 | 75     | 249,55 | 246,76 | 256 |     | 208 | 54 | 51 | 1,5  |
| 901-011-0064  | TL 64 14M 40  | 19F | GG | 64  | 3020 | 75     | 285,21 | 282,41 | 296 | 170 | 240 | 54 | 51 | 1,5  |
| 901-011-0072  | TL 72 14M 40  | 19  | GG | 72  | 3020 | 75     | 320,86 | 318,06 |     | 170 | 280 | 54 | 51 | 1,5  |
| 901-011-0080  | TL 80 14M 40  | 20  | GG | 80  | 3020 | 75     | 356,51 | 353,71 |     | 170 | 315 | 54 | 51 | 1,5  |
| 901-011-0090  | TL 90 14M 40  | 20  | GG | 90  | 3020 | 75     | 401,07 | 398,28 |     | 170 | 360 | 54 | 51 | 1,5  |
| 901-011-0112  | TL 112 14M 40 | 20  | GG | 112 | 3020 | 75     | 499,11 | 496,32 |     | 170 | 457 | 54 | 51 | 1,5  |
| 901-011-0144  | TL 144 14M 40 | 20  | GG | 144 | 3020 | 75     | 641,71 | 638,92 |     | 170 | 600 | 54 | 51 | 1,5  |
| 901-011-0168  | TL 168 14M 40 | 20  | GG | 168 | 3020 | 75     | 748,66 | 745,87 |     | 170 | 706 | 54 | 51 | 1,5  |
| 901-011-0192  | TL 192 14M 40 | 20  | GG | 192 | 3020 | 75     | 855,62 | 852,82 |     | 170 | 813 | 54 | 51 | 1,5  |

**Bezeichnung: HTD 14M**  
für Taperbuchsen

Teilung: **14 mm**  
Für Zahnriemenbreite: **55 mm**

Werkstoff (WS): **St=Stahl**  
**GG=Grauguss**

Passenden Spannbuchsen (SBT=Spannbuchsentyp)  
erhalten Sie ebenfalls von HolTech!

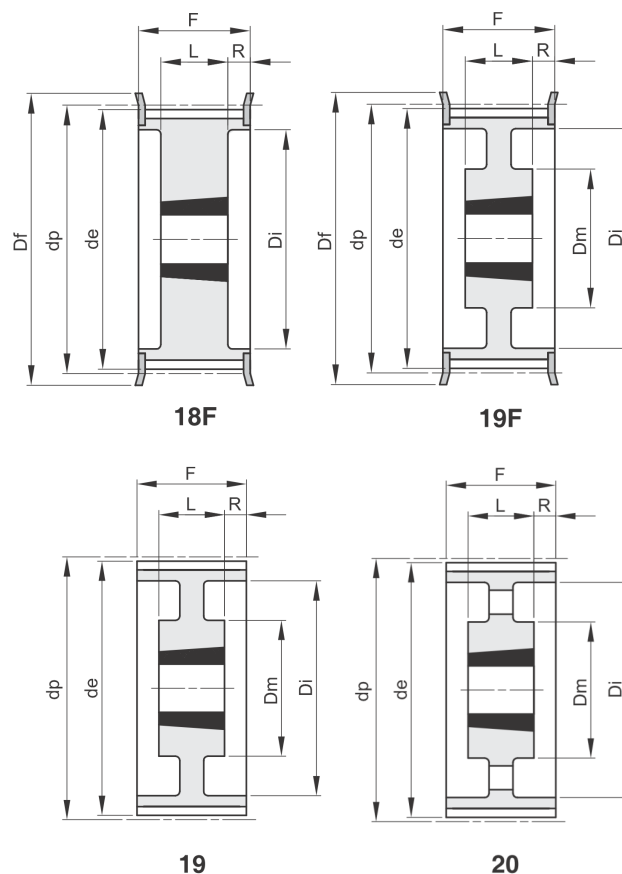



| Bestellnummer | Code          | Typ | WS | ZZ  | SBT  | B-max. | dp     | de     | DF  | Dm  | Di  | F  | L  | R    |
|---------------|---------------|-----|----|-----|------|--------|--------|--------|-----|-----|-----|----|----|------|
| 901-012-0028  | TL 28 14M 55  | 18F | St | 28  | 2012 | 50     | 124,78 | 122,12 | 127 |     | 94  | 70 | 32 | 19,0 |
| 901-012-0030  | TL 30 14M 55  | 18F | St | 30  | 2517 | 60     | 133,69 | 130,99 | 138 |     | 100 | 70 | 45 | 12,5 |
| 901-012-0032  | TL 32 14M 55  | 18F | St | 32  | 2517 | 60     | 142,60 | 139,88 | 154 |     | 108 | 70 | 45 | 12,5 |
| 901-012-0034  | TL 34 14M 55  | 18F | St | 34  | 2517 | 60     | 151,52 | 148,79 | 160 |     | 110 | 70 | 45 | 12,5 |
| 901-012-0036  | TL 36 14M 55  | 18F | St | 36  | 2517 | 60     | 160,43 | 157,68 | 168 |     | 120 | 70 | 45 | 12,5 |
| 901-012-0038  | TL 38 14M 55  | 18F | St | 38  | 2517 | 60     | 169,34 | 166,60 | 183 |     | 130 | 70 | 45 | 12,5 |
| 901-012-0040  | TL 40 14M 55  | 18F | St | 40  | 2517 | 60     | 178,25 | 175,49 | 188 |     | 138 | 70 | 45 | 12,5 |
| 901-012-0044  | TL 44 14M 55  | 18F | St | 44  | 3020 | 75     | 196,08 | 193,28 | 211 |     | 155 | 70 | 51 | 9,5  |
| 901-012-0048  | TL 48 14M 55  | 18F | St | 48  | 3020 | 75     | 213,90 | 211,11 | 226 |     | 170 | 70 | 51 | 9,5  |
| 901-012-0056  | TL 56 14M 55  | 18F | GG | 56  | 3020 | 75     | 249,55 | 246,76 | 256 |     | 208 | 70 | 51 | 9,5  |
| 901-012-0064  | TL 64 14M 55  | 19F | GG | 64  | 3020 | 75     | 285,21 | 282,41 | 296 | 170 | 240 | 70 | 51 | 9,5  |
| 901-012-0072  | TL 72 14M 55  | 19  | GG | 72  | 3020 | 75     | 320,86 | 318,06 |     | 170 | 280 | 70 | 51 | 9,5  |
| 901-012-0080  | TL 80 14M 55  | 20  | GG | 80  | 3020 | 75     | 356,51 | 353,71 |     | 170 | 315 | 70 | 51 | 9,5  |
| 901-012-0090  | TL 90 14M 55  | 20  | GG | 90  | 3020 | 75     | 401,07 | 398,28 |     | 170 | 360 | 70 | 51 | 9,5  |
| 901-012-0112  | TL 112 14M 55 | 20  | GG | 112 | 3020 | 75     | 499,11 | 496,32 |     | 170 | 457 | 70 | 51 | 9,5  |
| 901-012-0144  | TL 144 14M 55 | 20  | GG | 144 | 3020 | 75     | 641,71 | 638,92 |     | 170 | 600 | 70 | 51 | 9,5  |
| 901-012-0168  | TL 168 14M 55 | 20  | GG | 168 | 3020 | 75     | 748,66 | 745,87 |     | 170 | 706 | 70 | 51 | 9,5  |
| 901-012-0192  | TL 192 14M 55 | 20  | GG | 192 | 3020 | 75     | 855,62 | 852,82 |     | 170 | 813 | 70 | 51 | 9,5  |

### Bezeichnung: HTD 14M für Taperbuchsen

Teilung: **14 mm**  
Für Zahnriemenbreite: **85 mm**

Werkstoff (WS): St=Stahl  
GG=Grauguss

Passenden Spannbuchsen (SBT=Spannbuchsentyp)  
erhalten Sie ebenfalls von HolTech!

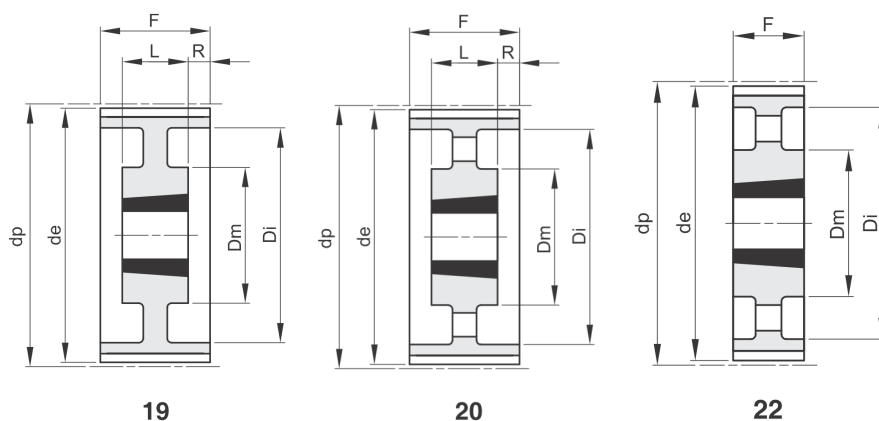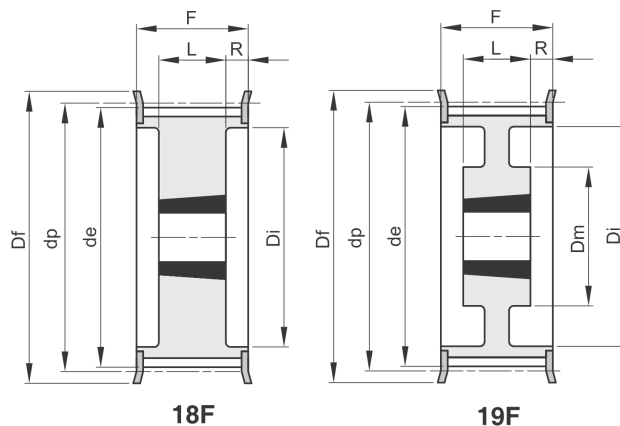


| Bestellnummer | Code          | Typ | WS | ZZ  | SBT  | B-max. | dp     | de     | DF  | Dm  | Di  | F   | L   | R    |
|---------------|---------------|-----|----|-----|------|--------|--------|--------|-----|-----|-----|-----|-----|------|
| 901-013-0028  | TL 28 14M 85  | 18F | St | 28  | 2517 | 60     | 124,78 | 122,12 | 127 |     | 98  | 102 | 45  | 28,5 |
| 901-013-0030  | TL 30 14M 85  | 18F | St | 30  | 2517 | 60     | 133,69 | 130,99 | 138 |     | 100 | 102 | 45  | 28,5 |
| 901-013-0032  | TL 32 14M 85  | 18F | St | 32  | 2517 | 60     | 142,60 | 139,88 | 154 |     | 108 | 102 | 45  | 28,5 |
| 901-013-0034  | TL 34 14M 85  | 18F | St | 34  | 2517 | 60     | 151,52 | 148,79 | 160 |     | 110 | 102 | 45  | 28,5 |
| 901-013-0036  | TL 36 14M 85  | 18F | St | 36  | 3020 | 75     | 160,43 | 157,68 | 168 |     | 125 | 102 | 51  | 25,5 |
| 901-013-0038  | TL 38 14M 85  | 18F | St | 38  | 3020 | 75     | 169,34 | 166,60 | 183 |     | 130 | 102 | 51  | 25,5 |
| 901-013-0040  | TL 40 14M 85  | 18F | St | 40  | 3020 | 75     | 178,25 | 175,49 | 188 |     | 138 | 102 | 51  | 25,5 |
| 901-013-0044  | TL 44 14M 85  | 18F | St | 44  | 3030 | 75     | 196,08 | 193,28 | 211 |     | 155 | 102 | 76  | 13,0 |
| 901-013-0048  | TL 48 14M 85  | 18F | St | 48  | 3030 | 75     | 213,90 | 211,11 | 226 |     | 170 | 102 | 76  | 13,0 |
| 901-013-0056  | TL 56 14M 85  | 18F | GG | 56  | 3525 | 90     | 249,55 | 246,76 | 256 |     | 210 | 102 | 65  | 18,5 |
| 901-013-0064  | TL 64 14M 85  | 19F | GG | 64  | 3525 | 90     | 285,21 | 282,41 | 296 | 190 | 240 | 102 | 65  | 18,5 |
| 901-013-0072  | TL 72 14M 85  | 19  | GG | 72  | 3525 | 90     | 320,86 | 318,06 |     | 190 | 280 | 102 | 65  | 18,5 |
| 901-013-0080  | TL 80 14M 85  | 20  | GG | 80  | 3525 | 90     | 356,51 | 353,71 |     | 190 | 315 | 102 | 65  | 18,5 |
| 901-013-0090  | TL 90 14M 85  | 20  | GG | 90  | 3525 | 90     | 401,07 | 398,28 |     | 190 | 360 | 102 | 65  | 18,5 |
| 901-013-0112  | TL 112 14M 85 | 20  | GG | 112 | 3525 | 90     | 499,11 | 496,32 |     | 190 | 457 | 102 | 65  | 18,5 |
| 901-013-0144  | TL 144 14M 85 | 20  | GG | 144 | 3525 | 90     | 641,71 | 638,92 |     | 190 | 600 | 102 | 65  | 18,5 |
| 901-013-0168  | TL 168 14M 85 | 20  | GG | 168 | 3525 | 90     | 748,66 | 745,87 |     | 190 | 706 | 102 | 65  | 18,5 |
| 901-013-0192  | TL 192 14M 85 | 22  | GG | 192 | 4040 | 100    | 855,62 | 852,82 |     | 230 | 813 | 102 | 102 |      |

**Bezeichnung: HTD 14M**  
für Taperbuchsen

Teilung: **14 mm**  
Für Zahnriemenbreite: **115 mm**

Werkstoff (WS): St=Stahl  
GG=Grauguss

Passenden Spannbuchsen (SBT=Spannbuchsentyp)  
erhalten Sie ebenfalls von HolTech!

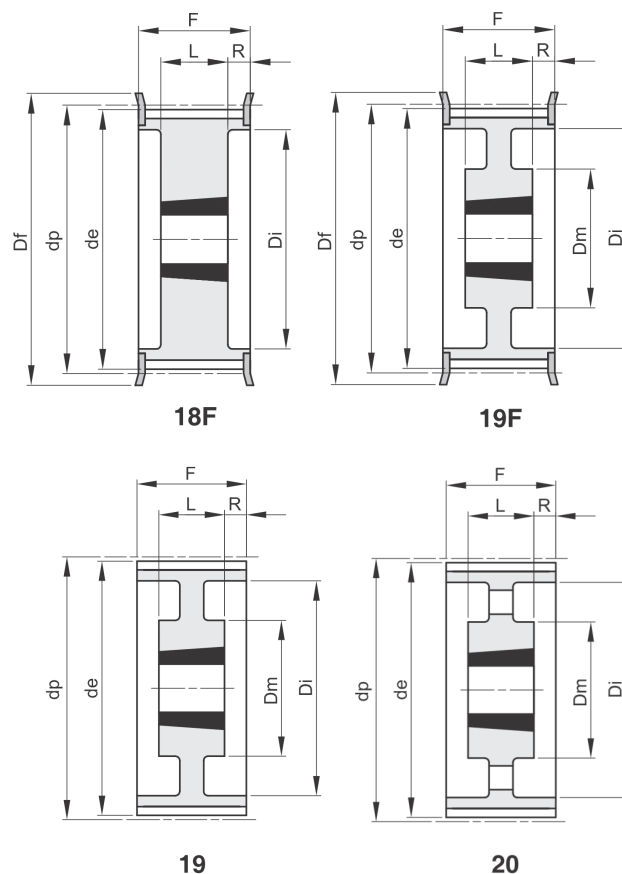


| Bestellnummer | Code           | Typ | WS | ZZ  | SBT  | B-max. | dp     | de     | DF  | Dm  | Di  | F   | L   | R    |
|---------------|----------------|-----|----|-----|------|--------|--------|--------|-----|-----|-----|-----|-----|------|
| 901-014-0028  | TL 28 14M 115  | 18F | St | 28  | 2517 | 60     | 124,78 | 122,12 | 127 |     | 98  | 133 | 45  | 44,0 |
| 901-014-0030  | TL 30 14M 115  | 18F | St | 30  | 2517 | 60     | 133,69 | 130,99 | 138 |     | 100 | 133 | 45  | 44,0 |
| 901-014-0032  | TL 32 14M 115  | 18F | St | 32  | 2517 | 60     | 142,60 | 139,88 | 154 |     | 108 | 133 | 45  | 44,0 |
| 901-014-0034  | TL 34 14M 115  | 18F | St | 34  | 2517 | 60     | 151,52 | 148,79 | 160 |     | 110 | 133 | 45  | 44,0 |
| 901-014-0036  | TL 36 14M 115  | 18F | St | 36  | 3020 | 75     | 160,43 | 157,68 | 168 |     | 125 | 133 | 51  | 41,0 |
| 901-014-0038  | TL 38 14M 115  | 18F | St | 38  | 3020 | 75     | 169,34 | 166,60 | 183 |     | 130 | 133 | 51  | 41,0 |
| 901-014-0040  | TL 40 14M 115  | 18F | St | 40  | 3020 | 75     | 178,25 | 175,49 | 188 |     | 138 | 133 | 51  | 41,0 |
| 901-014-0044  | TL 44 14M 115  | 18F | St | 44  | 3030 | 75     | 196,08 | 193,28 | 211 |     | 155 | 133 | 76  | 28,5 |
| 901-014-0048  | TL 48 14M 115  | 18F | St | 48  | 3030 | 75     | 213,90 | 211,11 | 226 |     | 170 | 133 | 76  | 28,5 |
| 901-014-0056  | TL 56 14M 115  | 18F | GG | 56  | 3535 | 90     | 249,55 | 246,76 | 256 |     | 210 | 133 | 89  | 22,0 |
| 901-014-0064  | TL 64 14M 115  | 19F | GG | 64  | 3535 | 90     | 285,21 | 282,41 | 296 | 190 | 240 | 133 | 89  | 22,0 |
| 901-014-0072  | TL 72 14M 115  | 19  | GG | 72  | 3535 | 90     | 320,86 | 318,06 |     | 190 | 280 | 133 | 89  | 22,0 |
| 901-014-0080  | TL 80 14M 115  | 20  | GG | 80  | 3535 | 90     | 356,51 | 353,71 |     | 190 | 315 | 133 | 89  | 22,0 |
| 901-014-0090  | TL 90 14M 115  | 20  | GG | 90  | 3535 | 90     | 401,07 | 398,28 |     | 190 | 360 | 133 | 89  | 22,0 |
| 901-014-0112  | TL 112 14M 115 | 20  | GG | 112 | 3535 | 90     | 499,11 | 496,32 |     | 190 | 457 | 133 | 89  | 22,0 |
| 901-014-0144  | TL 144 14M 115 | 20  | GG | 144 | 4040 | 100    | 641,71 | 638,92 |     | 230 | 600 | 133 | 102 | 15,5 |
| 901-014-0168  | TL 168 14M 115 | 20  | GG | 168 | 4040 | 100    | 748,66 | 745,87 |     | 230 | 706 | 133 | 102 | 15,5 |
| 901-014-0192  | TL 192 14M 115 | 20  | GG | 192 | 4040 | 100    | 855,62 | 852,82 |     | 230 | 813 | 133 | 102 | 15,5 |

### Bezeichnung: HTD 14M für Taperbuchsen

Teilung: **14 mm**  
Für Zahnriemenbreite: **170 mm**

Werkstoff (WS): St=Stahl  
GG=Grauguss

Passenden Spannbuchsen (SBT=Spannbuchsentyp)  
erhalten Sie ebenfalls von HolTech!

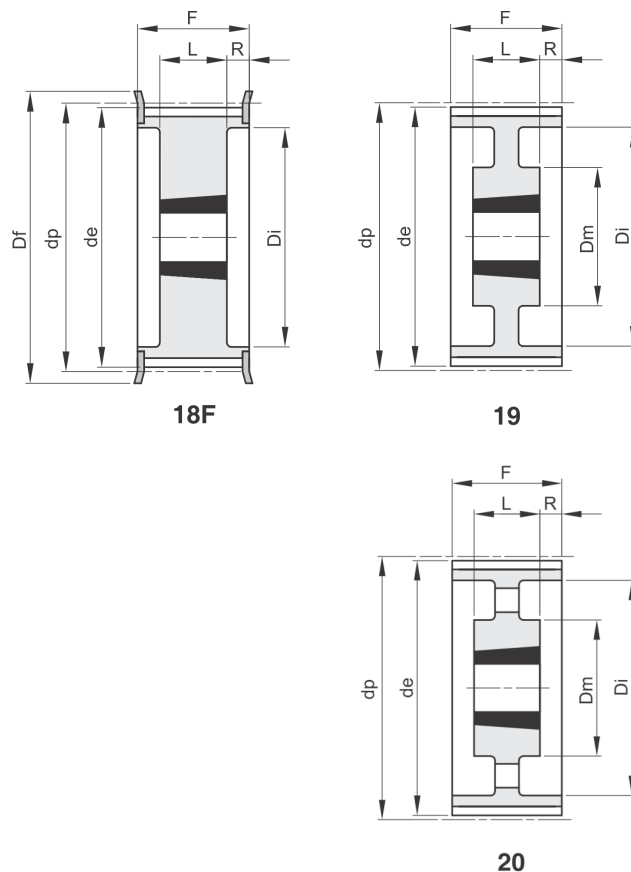


| Bestellnummer | Code           | Typ | WS | ZZ  | SBT  | B-max. | dp     | de     | DF  | Dm  | F   | L   | R    |
|---------------|----------------|-----|----|-----|------|--------|--------|--------|-----|-----|-----|-----|------|
| 901-015-0038  | TL 38 14M 170  | 18F | St | 38  | 3030 | 75     | 169,34 | 166,60 | 183 |     | 187 | 76  | 55,5 |
| 901-015-0040  | TL 40 14M 170  | 18F | St | 40  | 3030 | 75     | 178,25 | 175,49 | 188 |     | 187 | 76  | 55,5 |
| 901-015-0044  | TL 44 14M 170  | 18F | St | 44  | 3535 | 90     | 196,08 | 193,28 | 211 |     | 187 | 89  | 49,0 |
| 901-015-0048  | TL 48 14M 170  | 18F | St | 48  | 3535 | 90     | 213,90 | 211,11 | 226 |     | 187 | 89  | 49,0 |
| 901-015-0056  | TL 56 14M 170  | 18F | St | 56  | 3535 | 90     | 249,55 | 246,76 | 256 |     | 187 | 89  | 49,0 |
| 901-015-0064  | TL 64 14M 170  | 18F | GG | 64  | 4040 | 100    | 285,21 | 282,41 | 296 |     | 187 | 102 | 42,5 |
| 901-015-0072  | TL 72 14M 170  | 19  | GG | 72  | 4040 | 100    | 320,86 | 318,06 |     | 230 | 187 | 102 | 42,5 |
| 901-015-0080  | TL 80 14M 170  | 19  | GG | 80  | 4040 | 100    | 356,51 | 353,71 |     | 230 | 187 | 102 | 42,5 |
| 901-015-0090  | TL 90 14M 170  | 20  | GG | 90  | 4040 | 100    | 401,07 | 398,28 |     | 230 | 187 | 102 | 42,5 |
| 901-015-0112  | TL 112 14M 170 | 20  | GG | 112 | 5050 | 125    | 499,11 | 496,32 |     | 265 | 187 | 127 | 30,0 |
| 901-015-0144  | TL 144 14M 170 | 20  | GG | 144 | 5050 | 125    | 641,71 | 638,92 |     | 265 | 187 | 127 | 30,0 |
| 901-015-0168  | TL 168 14M 170 | 20  | GG | 168 | 5050 | 125    | 748,66 | 745,87 |     | 265 | 187 | 127 | 30,0 |
| 901-015-0192  | TL 192 14M 170 | 20  | GG | 192 | 5050 | 125    | 855,62 | 852,82 |     | 265 | 187 | 127 | 30,0 |

## Bezeichnung: T 2,5

Teilung: **2,5 mm**  
Für Zahnriemenbreite: **6 mm**

Werkstoff (WS): **Al=Aluminium**  
UNI 9006-T6 (Al)  
geeignet z. Harteloxieren

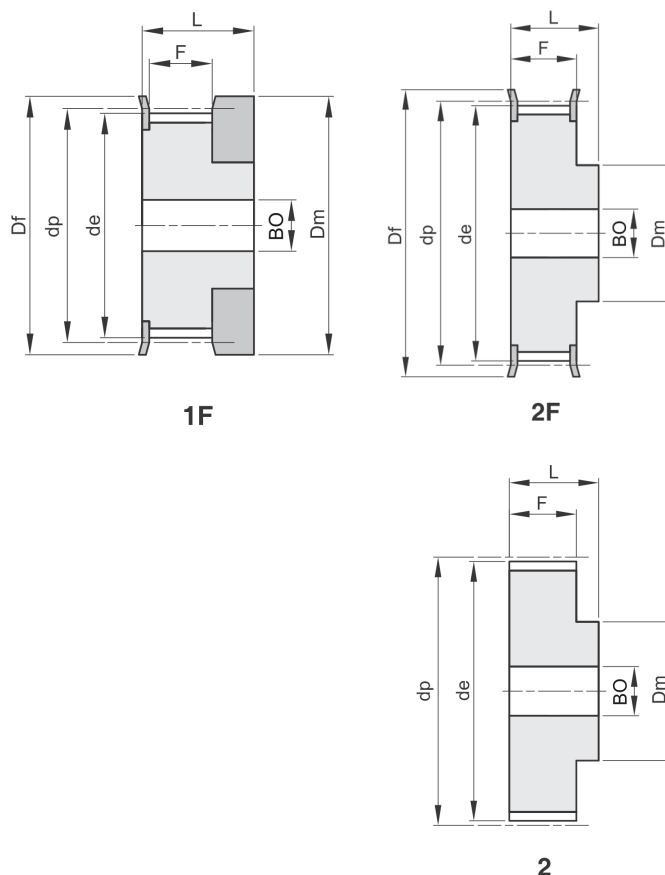


| Bestellnummer | Code        | Typ | WS | ZZ | de    | Df   | Dm | F  | L  | BO |
|---------------|-------------|-----|----|----|-------|------|----|----|----|----|
| 920-000-0012  | 16 T 2.5 12 | 1F  | Al | 12 | 9,00  | 13,0 | 12 | 9  | 16 |    |
| 920-000-0014  | 16 T 2.5 14 | 1F  | Al | 14 | 10,60 | 15,0 | 14 | 9  | 16 |    |
| 920-000-0015  | 16 T 2.5 15 | 1F  | Al | 15 | 11,40 | 15,0 | 15 | 9  | 16 |    |
| 920-000-0016  | 16 T 2.5 16 | 1F  | Al | 16 | 12,20 | 16,0 | 16 | 9  | 16 |    |
| 920-000-0018  | 16 T 2.5 18 | 2F  | Al | 18 | 13,80 | 18,0 | 10 | 10 | 16 | 3  |
| 920-000-0019  | 16 T 2.5 19 | 2F  | Al | 19 | 14,60 | 18,0 | 10 | 10 | 16 | 3  |
| 920-000-0020  | 16 T 2.5 20 | 2F  | Al | 20 | 15,40 | 19,5 | 11 | 10 | 16 | 3  |
| 920-000-0022  | 16 T 2.5 22 | 2F  | Al | 22 | 17,00 | 23,0 | 11 | 10 | 16 | 3  |
| 920-000-0024  | 16 T 2.5 24 | 2F  | Al | 24 | 18,55 | 23,0 | 12 | 10 | 16 | 3  |
| 920-000-0025  | 16 T 2.5 25 | 2F  | Al | 25 | 19,35 | 23,0 | 13 | 10 | 16 | 3  |
| 920-000-0026  | 16 T 2.5 26 | 2F  | Al | 26 | 20,15 | 25,0 | 14 | 10 | 16 | 4  |
| 920-000-0028  | 16 T 2.5 28 | 2F  | Al | 28 | 21,75 | 25,0 | 14 | 10 | 16 | 4  |
| 920-000-0030  | 16 T 2.5 30 | 2F  | Al | 30 | 23,35 | 28,0 | 16 | 10 | 16 | 6  |
| 920-000-0032  | 16 T 2.5 32 | 2F  | Al | 32 | 24,95 | 32,0 | 16 | 10 | 16 | 6  |
| 920-000-0036  | 16 T 2.5 36 | 2F  | Al | 36 | 28,10 | 36,0 | 20 | 10 | 16 | 6  |
| 920-000-0040  | 16 T 2.5 40 | 2F  | Al | 40 | 31,30 | 38,0 | 22 | 10 | 16 | 6  |
| 920-000-0044  | 16 T 2.5 44 | 2   | Al | 44 | 34,50 |      | 24 | 10 | 16 | 6  |
| 920-000-0048  | 16 T 2.5 48 | 2   | Al | 48 | 37,70 |      | 26 | 10 | 16 | 6  |
| 920-000-0060  | 16 T 2.5 60 | 2   | Al | 60 | 47,25 |      | 34 | 10 | 16 | 8  |

### Bezeichnung: T 5

Teilung: **5 mm**  
Für Zahnriemenbreite: **10 mm**

Werkstoff (WS): **Al=Aluminium**  
**UNI 9006-T6 (Al)**  
geeignet z. Harteloxieren

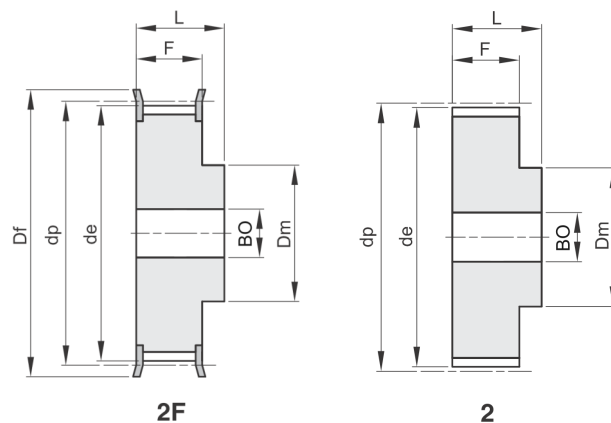


| Bestellnummer | Code      | Typ | WS | ZZ | de    | Df   | Dm | F  | L  | BO |
|---------------|-----------|-----|----|----|-------|------|----|----|----|----|
| 920-001-0010  | 21 T 5 10 | 2F  | Al | 10 | 15,05 | 19,5 | 8  | 15 | 21 |    |
| 920-001-0012  | 21 T 5 12 | 2F  | Al | 12 | 18,25 | 23,0 | 10 | 15 | 21 |    |
| 920-001-0014  | 21 T 5 14 | 2F  | Al | 14 | 21,45 | 25,0 | 13 | 15 | 21 |    |
| 920-001-0015  | 21 T 5 15 | 2F  | Al | 15 | 23,05 | 28,0 | 16 | 15 | 21 |    |
| 920-001-0016  | 21 T 5 16 | 2F  | Al | 16 | 24,60 | 32,0 | 18 | 15 | 21 |    |
| 920-001-0018  | 21 T 5 18 | 2F  | Al | 18 | 27,80 | 32,0 | 20 | 15 | 21 |    |
| 920-001-0019  | 21 T 5 19 | 2F  | Al | 19 | 29,40 | 36,0 | 22 | 15 | 21 |    |
| 920-001-0020  | 21 T 5 20 | 2F  | Al | 20 | 31,00 | 36,0 | 23 | 15 | 21 |    |
| 920-001-0022  | 21 T 5 22 | 2F  | Al | 22 | 34,25 | 38,0 | 24 | 15 | 21 |    |
| 920-001-0024  | 21 T 5 24 | 2F  | Al | 24 | 37,40 | 42,0 | 26 | 15 | 21 |    |
| 920-001-0025  | 21 T 5 25 | 2F  | Al | 25 | 38,95 | 44,0 | 26 | 15 | 21 |    |
| 920-001-0026  | 21 T 5 26 | 2F  | Al | 26 | 40,60 | 44,0 | 26 | 15 | 21 |    |
| 920-001-0027  | 21 T 5 27 | 2F  | Al | 27 | 42,20 | 48,0 | 30 | 15 | 21 | 8  |
| 920-001-0028  | 21 T 5 28 | 2F  | Al | 28 | 43,75 | 48,0 | 32 | 15 | 21 | 8  |
| 920-001-0030  | 21 T 5 30 | 2F  | Al | 30 | 46,95 | 51,0 | 34 | 15 | 21 | 8  |
| 920-001-0032  | 21 T 5 32 | 2F  | Al | 32 | 50,10 | 54,0 | 38 | 15 | 21 | 8  |
| 920-001-0036  | 21 T 5 36 | 2F  | Al | 36 | 56,45 | 63,0 | 38 | 15 | 21 | 8  |
| 920-001-0040  | 21 T 5 40 | 2F  | Al | 40 | 62,85 | 66,0 | 40 | 15 | 21 | 8  |
| 920-001-0042  | 21 T 5 42 | 2F  | Al | 42 | 66,00 | 71,0 | 40 | 15 | 21 | 8  |
| 920-001-0044  | 21 T 5 44 | 2   | Al | 44 | 69,20 |      | 45 | 15 | 21 | 8  |
| 920-001-0048  | 21 T 5 48 | 2   | Al | 48 | 75,55 |      | 50 | 15 | 21 | 8  |
| 920-001-0060  | 21 T 5 60 | 2   | Al | 60 | 94,65 |      | 65 | 15 | 21 | 8  |

## Bezeichnung: T 5

Teilung: **5 mm**  
Für Zahnriemenbreite: **16 mm**

Werkstoff (WS): **Al=Aluminium**  
**UNI 9006-T6 (Al)**  
geeignet z. Harteloxieren

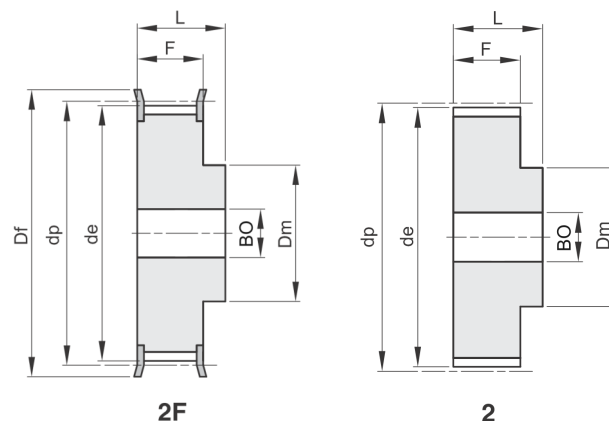


| Bestellnummer | Code      | Typ | WS | ZZ | de    | Df   | Dm | F  | L  | BO |
|---------------|-----------|-----|----|----|-------|------|----|----|----|----|
| 920-002-0010  | 27 T 5 10 | 2F  | Al | 10 | 15,05 | 19,5 | 8  | 21 | 27 |    |
| 920-002-0012  | 27 T 5 12 | 2F  | Al | 12 | 18,25 | 23,0 | 10 | 21 | 27 |    |
| 920-002-0014  | 27 T 5 14 | 2F  | Al | 14 | 21,45 | 25,0 | 13 | 21 | 27 |    |
| 920-002-0015  | 27 T 5 15 | 2F  | Al | 15 | 23,05 | 28,0 | 16 | 21 | 27 |    |
| 920-002-0016  | 27 T 5 16 | 2F  | Al | 16 | 24,60 | 32,0 | 18 | 21 | 27 |    |
| 920-002-0018  | 27 T 5 18 | 2F  | Al | 18 | 27,80 | 32,0 | 20 | 21 | 27 |    |
| 920-002-0019  | 27 T 5 19 | 2F  | Al | 19 | 29,40 | 36,0 | 22 | 21 | 27 |    |
| 920-002-0020  | 27 T 5 20 | 2F  | Al | 20 | 31,00 | 36,0 | 23 | 21 | 27 |    |
| 920-002-0022  | 27 T 5 22 | 2F  | Al | 22 | 34,25 | 38,0 | 24 | 21 | 27 |    |
| 920-002-0024  | 27 T 5 24 | 2F  | Al | 24 | 37,40 | 42,0 | 26 | 21 | 27 |    |
| 920-002-0025  | 27 T 5 25 | 2F  | Al | 25 | 38,95 | 44,0 | 26 | 21 | 27 |    |
| 920-002-0026  | 27 T 5 26 | 2F  | Al | 26 | 40,60 | 44,0 | 26 | 21 | 27 |    |
| 920-002-0027  | 27 T 5 27 | 2F  | Al | 27 | 42,20 | 48,0 | 30 | 21 | 27 | 8  |
| 920-002-0028  | 27 T 5 28 | 2F  | Al | 28 | 43,75 | 48,0 | 32 | 21 | 27 | 8  |
| 920-002-0030  | 27 T 5 30 | 2F  | Al | 30 | 46,95 | 51,0 | 34 | 21 | 27 | 8  |
| 920-002-0032  | 27 T 5 32 | 2F  | Al | 32 | 50,10 | 54,0 | 38 | 21 | 27 | 8  |
| 920-002-0036  | 27 T 5 36 | 2F  | Al | 36 | 56,45 | 63,0 | 38 | 21 | 27 | 8  |
| 920-002-0040  | 27 T 5 40 | 2F  | Al | 40 | 62,85 | 66,0 | 40 | 21 | 27 | 8  |
| 920-002-0042  | 27 T 5 42 | 2F  | Al | 42 | 66,00 | 71,0 | 40 | 21 | 27 | 8  |
| 920-002-0044  | 27 T 5 44 | 2   | Al | 44 | 69,20 |      | 45 | 21 | 27 | 8  |
| 920-002-0048  | 27 T 5 48 | 2   | Al | 48 | 75,55 |      | 50 | 21 | 27 | 8  |
| 920-002-0060  | 27 T 5 60 | 2   | Al | 60 | 94,65 |      | 65 | 21 | 27 | 8  |

### Bezeichnung: T 5

Teilung: **5 mm**  
Für Zahnriemenbreite: **25 mm**

Werkstoff (WS): **Al=Aluminium**  
**UNI 9006-T6 (Al)**  
geeignet z. Harteloxieren

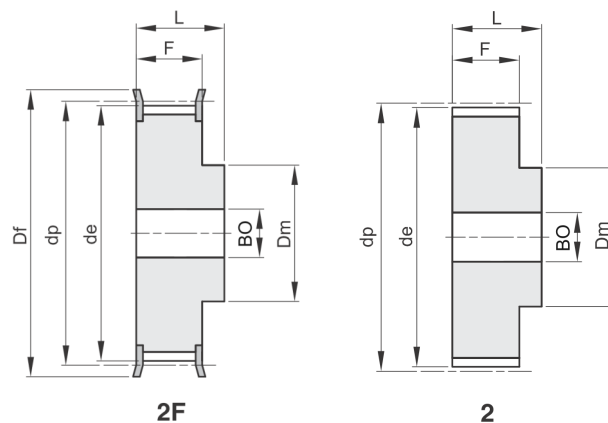


| Bestellnummer | Code      | Typ | WS | ZZ | de    | Df   | Dm | F  | L  | BO |
|---------------|-----------|-----|----|----|-------|------|----|----|----|----|
| 920-003-0010  | 36 T 5 10 | 2F  | Al | 10 | 15,05 | 19,5 | 8  | 30 | 36 |    |
| 920-003-0012  | 36 T 5 12 | 2F  | Al | 12 | 18,25 | 23,0 | 10 | 30 | 36 |    |
| 920-003-0014  | 36 T 5 14 | 2F  | Al | 14 | 21,45 | 25,0 | 13 | 30 | 36 |    |
| 920-003-0015  | 36 T 5 15 | 2F  | Al | 15 | 23,05 | 28,0 | 16 | 30 | 36 |    |
| 920-003-0016  | 36 T 5 16 | 2F  | Al | 16 | 24,60 | 32,0 | 18 | 30 | 36 |    |
| 920-003-0018  | 36 T 5 18 | 2F  | Al | 18 | 27,80 | 32,0 | 20 | 30 | 36 |    |
| 920-003-0019  | 36 T 5 19 | 2F  | Al | 19 | 29,40 | 36,0 | 22 | 30 | 36 |    |
| 920-003-0020  | 36 T 5 20 | 2F  | Al | 20 | 31,00 | 36,0 | 23 | 30 | 36 |    |
| 920-003-0022  | 36 T 5 22 | 2F  | Al | 22 | 34,25 | 38,0 | 24 | 30 | 36 |    |
| 920-003-0024  | 36 T 5 24 | 2F  | Al | 24 | 37,40 | 42,0 | 26 | 30 | 36 |    |
| 920-003-0025  | 36 T 5 25 | 2F  | Al | 25 | 38,95 | 44,0 | 26 | 30 | 36 |    |
| 920-003-0026  | 36 T 5 26 | 2F  | Al | 26 | 40,60 | 44,0 | 26 | 30 | 36 |    |
| 920-003-0027  | 36 T 5 27 | 2F  | Al | 27 | 42,20 | 48,0 | 30 | 30 | 36 | 8  |
| 920-003-0028  | 36 T 5 28 | 2F  | Al | 28 | 43,75 | 48,0 | 32 | 30 | 36 | 8  |
| 920-003-0030  | 36 T 5 30 | 2F  | Al | 30 | 46,95 | 51,0 | 34 | 30 | 36 | 8  |
| 920-003-0032  | 36 T 5 32 | 2F  | Al | 32 | 50,10 | 54,0 | 38 | 30 | 36 | 8  |
| 920-003-0036  | 36 T 5 36 | 2F  | Al | 36 | 56,45 | 63,0 | 38 | 30 | 36 | 8  |
| 920-003-0040  | 36 T 5 40 | 2F  | Al | 40 | 62,85 | 66,0 | 40 | 30 | 36 | 8  |
| 920-003-0042  | 36 T 5 42 | 2F  | Al | 42 | 66,00 | 71,0 | 40 | 30 | 36 | 8  |
| 920-003-0044  | 36 T 5 44 | 2   | Al | 44 | 69,20 |      | 45 | 30 | 36 | 8  |
| 920-003-0048  | 36 T 5 48 | 2   | Al | 48 | 75,55 |      | 50 | 30 | 36 | 8  |
| 920-003-0060  | 36 T 5 60 | 2   | Al | 60 | 94,65 |      | 65 | 30 | 36 | 8  |

## Bezeichnung: T 10

Teilung: **10 mm**  
Für Zahnriemenbreite: **16 mm**

Werkstoff (WS): **Al=Aluminium**  
**UNI 9006-T6 (Al)**  
geeignet z. Harteloxieren

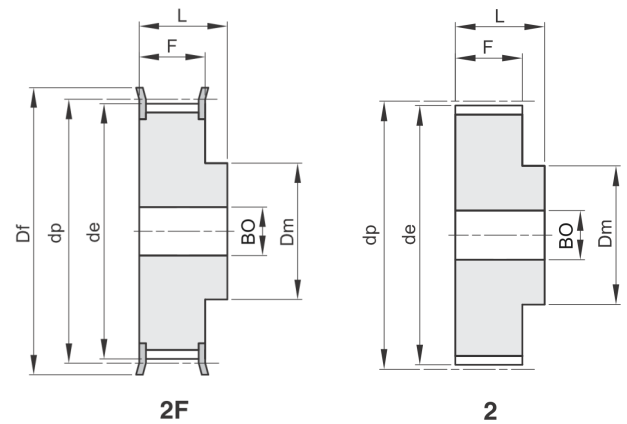


| Bestellnummer | Code       | Typ | WS | ZZ | de     | Df  | Dm  | F  | L  | BO |
|---------------|------------|-----|----|----|--------|-----|-----|----|----|----|
| 920-004-0012  | 31 T 10 12 | 2F  | Al | 12 | 36,35  | 42  | 28  | 21 | 31 | 6  |
| 920-004-0014  | 31 T 10 14 | 2F  | Al | 14 | 42,70  | 48  | 32  | 21 | 31 | 8  |
| 920-004-0015  | 31 T 10 15 | 2F  | Al | 15 | 45,90  | 51  | 32  | 21 | 31 | 8  |
| 920-004-0016  | 31 T 10 16 | 2F  | Al | 16 | 49,10  | 54  | 35  | 21 | 31 | 8  |
| 920-004-0018  | 31 T 10 18 | 2F  | Al | 18 | 55,45  | 60  | 40  | 21 | 31 | 8  |
| 920-004-0019  | 31 T 10 19 | 2F  | Al | 19 | 58,65  | 66  | 44  | 21 | 31 | 8  |
| 920-004-0020  | 31 T 10 20 | 2F  | Al | 20 | 61,80  | 66  | 46  | 21 | 31 | 8  |
| 920-004-0022  | 31 T 10 22 | 2F  | Al | 22 | 68,20  | 75  | 52  | 21 | 31 | 8  |
| 920-004-0024  | 31 T 10 24 | 2F  | Al | 24 | 74,55  | 83  | 58  | 21 | 31 | 8  |
| 920-004-0025  | 31 T 10 25 | 2F  | Al | 25 | 77,75  | 83  | 60  | 21 | 31 | 8  |
| 920-004-0026  | 31 T 10 26 | 2F  | Al | 26 | 80,90  | 87  | 60  | 21 | 31 | 8  |
| 920-004-0027  | 31 T 10 27 | 2F  | Al | 27 | 84,10  | 91  | 60  | 21 | 31 | 8  |
| 920-004-0028  | 31 T 10 28 | 2F  | Al | 28 | 87,25  | 93  | 60  | 21 | 31 | 8  |
| 920-004-0030  | 31 T 10 30 | 2F  | Al | 30 | 93,65  | 97  | 60  | 21 | 31 | 8  |
| 920-004-0032  | 31 T 10 32 | 2F  | Al | 32 | 100,00 | 106 | 65  | 21 | 31 | 10 |
| 920-004-0036  | 31 T 10 36 | 2F  | Al | 36 | 112,75 | 119 | 70  | 21 | 31 | 10 |
| 920-004-0040  | 31 T 10 40 | 2F  | Al | 40 | 125,45 | 131 | 80  | 21 | 31 | 10 |
| 920-004-0044  | 31 T 10 44 | 2   | Al | 44 | 138,20 |     | 88  | 21 | 31 | 10 |
| 920-004-0048  | 31 T 10 48 | 2   | Al | 48 | 150,95 |     | 95  | 21 | 31 | 16 |
| 920-004-0060  | 31 T 10 60 | 2   | Al | 60 | 189,15 |     | 110 | 21 | 31 | 16 |

### Bezeichnung: T 10

Teilung: **10 mm**  
Für Zahnriemenbreite: **25 mm**

Werkstoff (WS): **Al=Aluminium**  
**UNI 9006-T6 (Al)**  
geeignet z. Harteloxieren

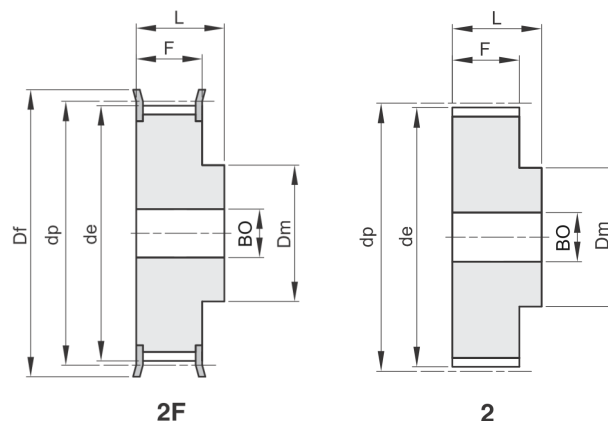


| Bestellnummer | Code       | Typ | WS | ZZ | de     | Df  | Dm  | F  | L  | BO |
|---------------|------------|-----|----|----|--------|-----|-----|----|----|----|
| 920-005-0012  | 40 T 10 12 | 2F  | Al | 12 | 36,35  | 42  | 28  | 30 | 40 | 6  |
| 920-005-0014  | 40 T 10 14 | 2F  | Al | 14 | 42,70  | 48  | 32  | 30 | 40 | 8  |
| 920-005-0015  | 40 T 10 15 | 2F  | Al | 15 | 45,90  | 51  | 32  | 30 | 40 | 8  |
| 920-005-0016  | 40 T 10 16 | 2F  | Al | 16 | 49,10  | 54  | 35  | 30 | 40 | 8  |
| 920-005-0018  | 40 T 10 18 | 2F  | Al | 18 | 55,45  | 60  | 40  | 30 | 40 | 8  |
| 920-005-0019  | 40 T 10 19 | 2F  | Al | 19 | 58,65  | 66  | 44  | 30 | 40 | 8  |
| 920-005-0020  | 40 T 10 20 | 2F  | Al | 20 | 61,80  | 66  | 46  | 30 | 40 | 8  |
| 920-005-0022  | 40 T 10 22 | 2F  | Al | 22 | 68,20  | 75  | 52  | 30 | 40 | 8  |
| 920-005-0024  | 40 T 10 24 | 2F  | Al | 24 | 74,55  | 83  | 58  | 30 | 40 | 8  |
| 920-005-0025  | 40 T 10 25 | 2F  | Al | 25 | 77,75  | 83  | 60  | 30 | 40 | 8  |
| 920-005-0026  | 40 T 10 26 | 2F  | Al | 26 | 80,90  | 87  | 60  | 30 | 40 | 8  |
| 920-005-0027  | 40 T 10 27 | 2F  | Al | 27 | 84,10  | 91  | 60  | 30 | 40 | 8  |
| 920-005-0028  | 40 T 10 28 | 2F  | Al | 28 | 87,25  | 93  | 60  | 30 | 40 | 8  |
| 920-005-0030  | 40 T 10 30 | 2F  | Al | 30 | 93,65  | 97  | 60  | 30 | 40 | 8  |
| 920-005-0032  | 40 T 10 32 | 2F  | Al | 32 | 100,00 | 106 | 65  | 30 | 40 | 10 |
| 920-005-0036  | 40 T 10 36 | 2F  | Al | 36 | 112,75 | 119 | 70  | 30 | 40 | 10 |
| 920-005-0040  | 40 T 10 40 | 2F  | Al | 40 | 125,45 | 131 | 80  | 30 | 40 | 10 |
| 920-005-0044  | 40 T 10 44 | 2   | Al | 44 | 138,20 |     | 88  | 30 | 40 | 10 |
| 920-005-0048  | 40 T 10 48 | 2   | Al | 48 | 150,95 |     | 95  | 30 | 40 | 16 |
| 920-005-0060  | 40 T 10 60 | 2   | Al | 60 | 189,15 |     | 110 | 30 | 40 | 16 |

## Bezeichnung: T 10

Teilung: **10 mm**  
Für Zahnriemenbreite: **32 mm**

Werkstoff (WS): **Al=Aluminium**  
**UNI 9006-T6 (Al)**  
geeignet z. Harteloxieren

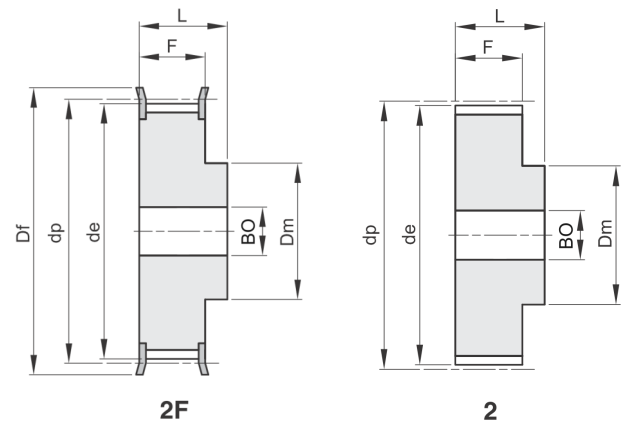


| Bestellnummer | Code       | Typ | WS | ZZ | de     | Df  | Dm  | F  | L  | BO |
|---------------|------------|-----|----|----|--------|-----|-----|----|----|----|
| 920-006-0018  | 47 T 10 18 | 2F  | Al | 18 | 55,45  | 60  | 40  | 37 | 47 | 10 |
| 920-006-0019  | 47 T 10 19 | 2F  | Al | 19 | 58,65  | 66  | 44  | 37 | 47 | 10 |
| 920-006-0020  | 47 T 10 20 | 2F  | Al | 20 | 61,80  | 66  | 46  | 37 | 47 | 12 |
| 920-006-0022  | 47 T 10 22 | 2F  | Al | 22 | 68,20  | 75  | 52  | 37 | 47 | 12 |
| 920-006-0024  | 47 T 10 24 | 2F  | Al | 24 | 74,55  | 83  | 58  | 37 | 47 | 12 |
| 920-006-0025  | 47 T 10 25 | 2F  | Al | 25 | 77,75  | 83  | 60  | 37 | 47 | 12 |
| 920-006-0026  | 47 T 10 26 | 2F  | Al | 26 | 80,90  | 87  | 60  | 37 | 47 | 12 |
| 920-006-0027  | 47 T 10 27 | 2F  | Al | 27 | 84,10  | 91  | 60  | 37 | 47 | 12 |
| 920-006-0028  | 47 T 10 28 | 2F  | Al | 28 | 87,25  | 93  | 60  | 37 | 47 | 12 |
| 920-006-0030  | 47 T 10 30 | 2F  | Al | 30 | 93,65  | 97  | 60  | 37 | 47 | 12 |
| 920-006-0032  | 47 T 10 32 | 2F  | Al | 32 | 100,00 | 106 | 65  | 37 | 47 | 12 |
| 920-006-0036  | 47 T 10 36 | 2F  | Al | 36 | 112,75 | 119 | 70  | 37 | 47 | 16 |
| 920-006-0040  | 47 T 10 40 | 2F  | Al | 40 | 125,45 | 131 | 80  | 37 | 47 | 16 |
| 920-006-0044  | 47 T 10 44 | 2   | Al | 44 | 138,20 |     | 88  | 37 | 47 | 16 |
| 920-006-0048  | 47 T 10 48 | 2   | Al | 48 | 150,95 |     | 95  | 37 | 47 | 16 |
| 920-006-0060  | 47 T 10 60 | 2   | Al | 60 | 189,10 |     | 110 | 37 | 47 | 16 |

### Bezeichnung: T 10

Teilung: **10 mm**  
Für Zahnriemenbreite: **50 mm**

Werkstoff (WS): **Al=Aluminium**  
**UNI 9006-T6 (Al)**  
geeignet z. Harteloxieren

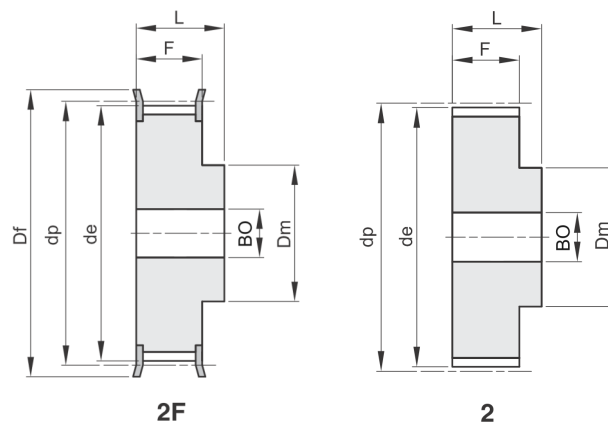


| Bestellnummer | Code       | Typ | WS | ZZ | de     | Df  | Dm  | F  | L  | BO |
|---------------|------------|-----|----|----|--------|-----|-----|----|----|----|
| 920-007-0018  | 66 T 10 18 | 2F  | Al | 18 | 55,45  | 60  | 40  | 56 | 66 | 10 |
| 920-007-0019  | 66 T 10 19 | 2F  | Al | 19 | 58,65  | 66  | 44  | 56 | 66 | 10 |
| 920-007-0020  | 66 T 10 20 | 2F  | Al | 20 | 61,80  | 66  | 46  | 56 | 66 | 12 |
| 920-007-0022  | 66 T 10 22 | 2F  | Al | 22 | 68,20  | 75  | 52  | 56 | 66 | 12 |
| 920-007-0024  | 66 T 10 24 | 2F  | Al | 24 | 74,55  | 83  | 58  | 56 | 66 | 12 |
| 920-007-0025  | 66 T 10 25 | 2F  | Al | 25 | 77,75  | 83  | 60  | 56 | 66 | 12 |
| 920-007-0026  | 66 T 10 26 | 2F  | Al | 26 | 80,90  | 87  | 60  | 56 | 66 | 12 |
| 920-007-0027  | 66 T 10 27 | 2F  | Al | 27 | 84,10  | 91  | 60  | 56 | 66 | 12 |
| 920-007-0028  | 66 T 10 28 | 2F  | Al | 28 | 87,25  | 93  | 60  | 56 | 66 | 12 |
| 920-007-0030  | 66 T 10 30 | 2F  | Al | 30 | 93,65  | 97  | 60  | 56 | 66 | 12 |
| 920-007-0032  | 66 T 10 32 | 2F  | Al | 32 | 100,00 | 106 | 65  | 56 | 66 | 12 |
| 920-007-0036  | 66 T 10 36 | 2F  | Al | 36 | 112,75 | 119 | 70  | 56 | 66 | 16 |
| 920-007-0040  | 66 T 10 40 | 2F  | Al | 40 | 125,45 | 131 | 80  | 56 | 66 | 16 |
| 920-007-0044  | 66 T 10 44 | 2   | Al | 44 | 138,20 |     | 88  | 56 | 66 | 16 |
| 920-007-0048  | 66 T 10 48 | 2   | Al | 48 | 150,95 |     | 95  | 56 | 66 | 16 |
| 920-007-0060  | 66 T 10 60 | 2   | Al | 60 | 189,10 |     | 110 | 56 | 66 | 16 |

## Bezeichnung: AT 5

Teilung: **5 mm**  
Für Zahnriemenbreite: **10 mm**

Werkstoff (WS): **Al=Aluminium**  
**UNI 9006-T6 (Al)**  
geeignet z. Harteloxieren

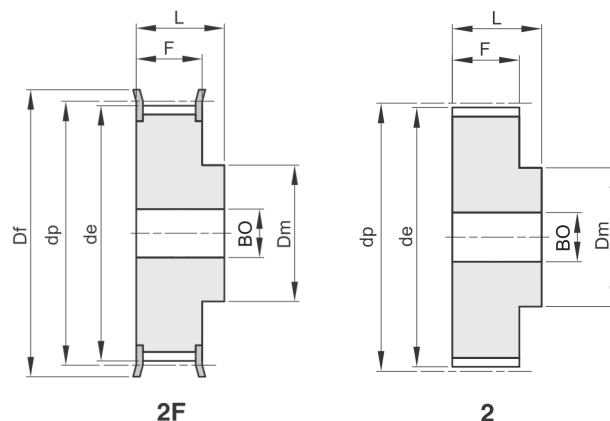


| Bestellnummer | Code       | Typ | WS | ZZ | de    | Df | Dm | F  | L  | BO |
|---------------|------------|-----|----|----|-------|----|----|----|----|----|
| 930-001-0012  | 21 AT 5 12 | 2F  | Al | 12 | 17,85 | 23 | 10 | 15 | 21 |    |
| 930-001-0014  | 21 AT 5 14 | 2F  | Al | 14 | 21,05 | 25 | 13 | 15 | 21 |    |
| 930-001-0015  | 21 AT 5 15 | 2F  | Al | 15 | 22,65 | 28 | 16 | 15 | 21 |    |
| 930-001-0016  | 21 AT 5 16 | 2F  | Al | 16 | 24,20 | 32 | 18 | 15 | 21 |    |
| 930-001-0018  | 21 AT 5 18 | 2F  | Al | 18 | 27,40 | 32 | 20 | 15 | 21 |    |
| 930-001-0019  | 21 AT 5 19 | 2F  | Al | 19 | 29,00 | 36 | 22 | 15 | 21 |    |
| 930-001-0020  | 21 AT 5 20 | 2F  | Al | 20 | 30,60 | 36 | 23 | 15 | 21 |    |
| 930-001-0022  | 21 AT 5 22 | 2F  | Al | 22 | 33,85 | 38 | 24 | 15 | 21 |    |
| 930-001-0024  | 21 AT 5 24 | 2F  | Al | 24 | 37,00 | 42 | 26 | 15 | 21 |    |
| 930-001-0025  | 21 AT 5 25 | 2F  | Al | 25 | 38,55 | 44 | 26 | 15 | 21 |    |
| 930-001-0026  | 21 AT 5 26 | 2F  | Al | 26 | 40,20 | 44 | 26 | 15 | 21 |    |
| 930-001-0027  | 21 AT 5 27 | 2F  | Al | 27 | 41,80 | 48 | 30 | 15 | 21 | 8  |
| 930-001-0028  | 21 AT 5 28 | 2F  | Al | 28 | 43,35 | 48 | 32 | 15 | 21 | 8  |
| 930-001-0030  | 21 AT 5 30 | 2F  | Al | 30 | 46,55 | 51 | 34 | 15 | 21 | 8  |
| 930-001-0032  | 21 AT 5 32 | 2F  | Al | 32 | 49,70 | 54 | 38 | 15 | 21 | 8  |
| 930-001-0036  | 21 AT 5 36 | 2F  | Al | 36 | 56,05 | 63 | 38 | 15 | 21 | 8  |
| 930-001-0040  | 21 AT 5 40 | 2F  | Al | 40 | 62,45 | 66 | 40 | 15 | 21 | 8  |
| 930-001-0042  | 21 AT 5 42 | 2F  | Al | 42 | 65,60 | 71 | 40 | 15 | 21 | 8  |
| 930-001-0044  | 21 AT 5 44 | 2   | Al | 44 | 68,80 |    | 45 | 15 | 21 | 8  |
| 930-001-0048  | 21 AT 5 48 | 2   | Al | 48 | 75,15 |    | 50 | 15 | 21 | 8  |
| 930-001-0060  | 21 AT 5 60 | 2   | Al | 60 | 94,25 |    | 65 | 15 | 21 | 8  |

### Bezeichnung: AT 5

Teilung: **5 mm**  
Für Zahnriemenbreite: **16 mm**

Werkstoff (WS): **Al=Aluminium**  
**UNI 9006-T6 (Al)**  
geeignet z. Harteloxieren

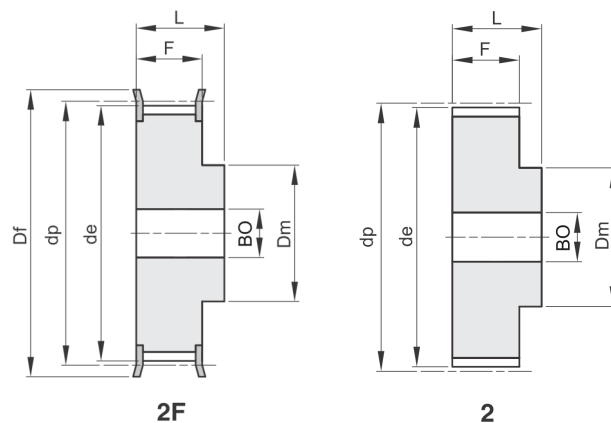


| Bestellnummer | Code       | Typ | WS | ZZ | de    | Df | Dm | F  | L  | BO |
|---------------|------------|-----|----|----|-------|----|----|----|----|----|
| 930-002-0012  | 27 AT 5 12 | 2F  | Al | 12 | 17,85 | 23 | 10 | 21 | 27 |    |
| 930-002-0014  | 27 AT 5 14 | 2F  | Al | 14 | 21,05 | 25 | 13 | 21 | 27 |    |
| 930-002-0015  | 27 AT 5 15 | 2F  | Al | 15 | 22,65 | 28 | 16 | 21 | 27 |    |
| 930-002-0016  | 27 AT 5 16 | 2F  | Al | 16 | 24,20 | 32 | 18 | 21 | 27 |    |
| 930-002-0018  | 27 AT 5 18 | 2F  | Al | 18 | 27,40 | 32 | 20 | 21 | 27 |    |
| 930-002-0019  | 27 AT 5 19 | 2F  | Al | 19 | 29,00 | 36 | 22 | 21 | 27 |    |
| 930-002-0020  | 27 AT 5 20 | 2F  | Al | 20 | 30,60 | 36 | 23 | 21 | 27 |    |
| 930-002-0022  | 27 AT 5 22 | 2F  | Al | 22 | 33,85 | 38 | 24 | 21 | 27 |    |
| 930-002-0024  | 27 AT 5 24 | 2F  | Al | 24 | 37,00 | 42 | 26 | 21 | 27 |    |
| 930-002-0025  | 27 AT 5 25 | 2F  | Al | 25 | 38,55 | 44 | 26 | 21 | 27 |    |
| 930-002-0026  | 27 AT 5 26 | 2F  | Al | 26 | 40,20 | 44 | 26 | 21 | 27 |    |
| 930-002-0027  | 27 AT 5 27 | 2F  | Al | 27 | 41,80 | 48 | 30 | 21 | 27 | 8  |
| 930-002-0028  | 27 AT 5 28 | 2F  | Al | 28 | 43,35 | 48 | 32 | 21 | 27 | 8  |
| 930-002-0030  | 27 AT 5 30 | 2F  | Al | 30 | 46,55 | 51 | 34 | 21 | 27 | 8  |
| 930-002-0032  | 27 AT 5 32 | 2F  | Al | 32 | 49,70 | 54 | 38 | 21 | 27 | 8  |
| 930-002-0036  | 27 AT 5 36 | 2F  | Al | 36 | 56,05 | 63 | 38 | 21 | 27 | 8  |
| 930-002-0040  | 27 AT 5 40 | 2F  | Al | 40 | 62,45 | 66 | 40 | 21 | 27 | 8  |
| 930-002-0042  | 27 AT 5 42 | 2F  | Al | 42 | 65,60 | 71 | 40 | 21 | 27 | 8  |
| 930-002-0044  | 27 AT 5 44 | 2   | Al | 44 | 68,80 |    | 45 | 21 | 27 | 8  |
| 930-002-0048  | 27 AT 5 48 | 2   | Al | 48 | 75,15 |    | 50 | 21 | 27 | 8  |
| 930-002-0060  | 27 AT 5 60 | 2   | Al | 60 | 94,25 |    | 65 | 21 | 27 | 8  |

## Bezeichnung: AT 5

Teilung: **5 mm**  
Für Zahnriemenbreite: **25 mm**

Werkstoff (WS): **Al=Aluminium**  
**UNI 9006-T6 (Al)**  
geeignet z. Harteloxieren

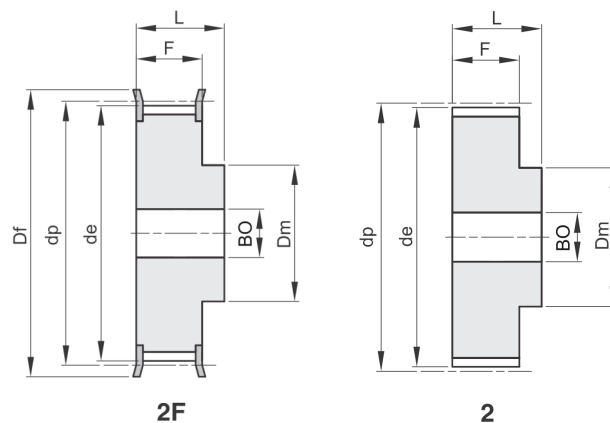


| Bestellnummer | Code       | Typ | WS | ZZ | de    | Df | Dm | F  | L  | BO |
|---------------|------------|-----|----|----|-------|----|----|----|----|----|
| 930-003-0012  | 36 AT 5 12 | 2F  | Al | 12 | 17,85 | 23 | 10 | 30 | 36 |    |
| 930-003-0014  | 36 AT 5 14 | 2F  | Al | 14 | 21,05 | 25 | 13 | 30 | 36 |    |
| 930-003-0015  | 36 AT 5 15 | 2F  | Al | 15 | 22,65 | 28 | 16 | 30 | 36 |    |
| 930-003-0016  | 36 AT 5 16 | 2F  | Al | 16 | 24,20 | 32 | 18 | 30 | 36 |    |
| 930-003-0018  | 36 AT 5 18 | 2F  | Al | 18 | 27,40 | 32 | 20 | 30 | 36 |    |
| 930-003-0019  | 36 AT 5 19 | 2F  | Al | 19 | 29,00 | 36 | 22 | 30 | 36 |    |
| 930-003-0020  | 36 AT 5 20 | 2F  | Al | 20 | 30,60 | 36 | 23 | 30 | 36 |    |
| 930-003-0022  | 36 AT 5 22 | 2F  | Al | 22 | 33,85 | 38 | 24 | 30 | 36 |    |
| 930-003-0024  | 36 AT 5 24 | 2F  | Al | 24 | 37,00 | 42 | 26 | 30 | 36 | 8  |
| 930-003-0025  | 36 AT 5 25 | 2F  | Al | 25 | 38,55 | 44 | 26 | 30 | 36 | 8  |
| 930-003-0026  | 36 AT 5 26 | 2F  | Al | 26 | 40,20 | 44 | 26 | 30 | 36 | 8  |
| 930-003-0027  | 36 AT 5 27 | 2F  | Al | 27 | 41,80 | 48 | 30 | 30 | 36 | 8  |
| 930-003-0028  | 36 AT 5 28 | 2F  | Al | 28 | 43,35 | 48 | 32 | 30 | 36 | 8  |
| 930-003-0030  | 36 AT 5 30 | 2F  | Al | 30 | 46,55 | 51 | 34 | 30 | 36 | 8  |
| 930-003-0032  | 36 AT 5 32 | 2F  | Al | 32 | 49,70 | 54 | 38 | 30 | 36 | 8  |
| 930-003-0036  | 36 AT 5 36 | 2F  | Al | 36 | 56,05 | 63 | 38 | 30 | 36 | 8  |
| 930-003-0040  | 36 AT 5 40 | 2F  | Al | 40 | 62,45 | 66 | 40 | 30 | 36 | 8  |
| 930-003-0042  | 36 AT 5 42 | 2F  | Al | 42 | 65,60 | 71 | 40 | 30 | 36 | 8  |
| 930-003-0044  | 36 AT 5 44 | 2   | Al | 44 | 68,80 |    | 45 | 30 | 36 | 8  |
| 930-003-0048  | 36 AT 5 48 | 2   | Al | 48 | 75,15 |    | 50 | 30 | 36 | 8  |
| 930-003-0060  | 36 AT 5 60 | 2   | Al | 60 | 94,25 |    | 65 | 30 | 36 | 8  |

### Bezeichnung: AT 10

Teilung: **10 mm**  
Für Zahnriemenbreite: **16 mm**

Werkstoff (WS): **Al=Aluminium**  
**UNI 9006-T6 (Al)**  
geeignet z. Harteloxieren

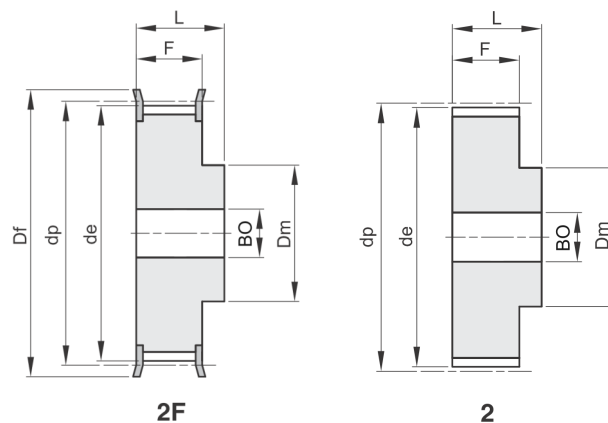


| Bestellnummer | Code        | Typ | WS | ZZ | de     | Df  | Dm  | F  | L  | BO |
|---------------|-------------|-----|----|----|--------|-----|-----|----|----|----|
| 930-004-0015  | 31 AT 10 15 | 2F  | Al | 15 | 45,90  | 51  | 32  | 21 | 31 | 8  |
| 930-004-0016  | 31 AT 10 16 | 2F  | Al | 16 | 49,10  | 54  | 35  | 21 | 31 | 8  |
| 930-004-0018  | 31 AT 10 18 | 2F  | Al | 18 | 55,45  | 60  | 40  | 21 | 31 | 8  |
| 930-004-0019  | 31 AT 10 19 | 2F  | Al | 19 | 58,65  | 66  | 44  | 21 | 31 | 8  |
| 930-004-0020  | 31 AT 10 20 | 2F  | Al | 20 | 61,80  | 66  | 46  | 21 | 31 | 8  |
| 930-004-0022  | 31 AT 10 22 | 2F  | Al | 22 | 68,20  | 75  | 52  | 21 | 31 | 8  |
| 930-004-0024  | 31 AT 10 24 | 2F  | Al | 24 | 74,55  | 83  | 58  | 21 | 31 | 8  |
| 930-004-0025  | 31 AT 10 25 | 2F  | Al | 25 | 77,75  | 83  | 60  | 21 | 31 | 8  |
| 930-004-0026  | 31 AT 10 26 | 2F  | Al | 26 | 80,90  | 87  | 60  | 21 | 31 | 8  |
| 930-004-0027  | 31 AT 10 27 | 2F  | Al | 27 | 84,05  | 91  | 60  | 21 | 31 | 8  |
| 930-004-0028  | 31 AT 10 28 | 2F  | Al | 28 | 87,25  | 93  | 60  | 21 | 31 | 8  |
| 930-004-0030  | 31 AT 10 30 | 2F  | Al | 30 | 93,65  | 97  | 60  | 21 | 31 | 8  |
| 930-004-0032  | 31 AT 10 32 | 2F  | Al | 32 | 100,00 | 106 | 65  | 21 | 31 | 10 |
| 930-004-0036  | 31 AT 10 36 | 2F  | Al | 36 | 112,75 | 119 | 70  | 21 | 31 | 10 |
| 930-004-0040  | 31 AT 10 40 | 2F  | Al | 40 | 125,45 | 131 | 80  | 21 | 31 | 10 |
| 930-004-0044  | 31 AT 10 44 | 2   | Al | 44 | 138,20 |     | 88  | 21 | 31 | 10 |
| 930-004-0048  | 31 AT 10 48 | 2   | Al | 48 | 150,95 |     | 95  | 21 | 31 | 16 |
| 930-004-0060  | 31 AT 10 60 | 2   | Al | 60 | 189,15 |     | 110 | 21 | 31 | 16 |

## Bezeichnung: AT 10

Teilung: **10 mm**  
Für Zahnriemenbreite: **25 mm**

Werkstoff (WS): **Al=Aluminium**  
**UNI 9006-T6 (Al)**  
geeignet z. Harteloxieren

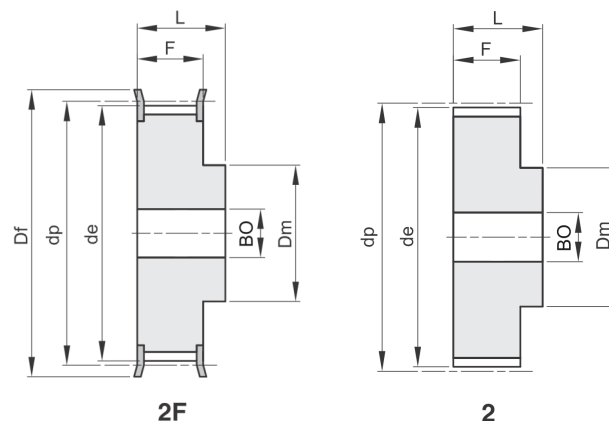


| Bestellnummer | Code        | Typ | WS | ZZ | de     | Df  | Dm  | F  | L  | BO |
|---------------|-------------|-----|----|----|--------|-----|-----|----|----|----|
| 930-005-0015  | 40 AT 10 15 | 2F  | Al | 15 | 45,90  | 51  | 32  | 30 | 40 | 8  |
| 930-005-0016  | 40 AT 10 16 | 2F  | Al | 16 | 49,10  | 54  | 35  | 30 | 40 | 8  |
| 930-005-0018  | 40 AT 10 18 | 2F  | Al | 18 | 55,45  | 60  | 40  | 30 | 40 | 8  |
| 930-005-0019  | 40 AT 10 19 | 2F  | Al | 19 | 58,65  | 66  | 44  | 30 | 40 | 8  |
| 930-005-0020  | 40 AT 10 20 | 2F  | Al | 20 | 61,80  | 66  | 46  | 30 | 40 | 8  |
| 930-005-0022  | 40 AT 10 22 | 2F  | Al | 22 | 68,20  | 75  | 52  | 30 | 40 | 8  |
| 930-005-0024  | 40 AT 10 24 | 2F  | Al | 24 | 74,55  | 83  | 58  | 30 | 40 | 8  |
| 930-005-0025  | 40 AT 10 25 | 2F  | Al | 25 | 77,75  | 83  | 60  | 30 | 40 | 8  |
| 930-005-0026  | 40 AT 10 26 | 2F  | Al | 26 | 80,90  | 87  | 60  | 30 | 40 | 8  |
| 930-005-0027  | 40 AT 10 27 | 2F  | Al | 27 | 84,05  | 91  | 60  | 30 | 40 | 8  |
| 930-005-0028  | 40 AT 10 28 | 2F  | Al | 28 | 87,25  | 93  | 60  | 30 | 40 | 8  |
| 930-005-0030  | 40 AT 10 30 | 2F  | Al | 30 | 93,65  | 97  | 60  | 30 | 40 | 8  |
| 930-005-0032  | 40 AT 10 32 | 2F  | Al | 32 | 100,00 | 106 | 65  | 30 | 40 | 10 |
| 930-005-0036  | 40 AT 10 36 | 2F  | Al | 36 | 112,75 | 119 | 70  | 30 | 40 | 10 |
| 930-005-0040  | 40 AT 10 40 | 2F  | Al | 40 | 125,45 | 131 | 80  | 30 | 40 | 10 |
| 930-005-0044  | 40 AT 10 44 | 2   | Al | 44 | 138,20 |     | 88  | 30 | 40 | 10 |
| 930-005-0048  | 40 AT 10 48 | 2   | Al | 48 | 150,95 |     | 95  | 30 | 40 | 16 |
| 930-005-0060  | 40 AT 10 60 | 2   | Al | 60 | 189,15 |     | 110 | 30 | 40 | 16 |

### Bezeichnung: AT 10

Teilung: **10 mm**  
Für Zahnriemenbreite: **32 mm**

Werkstoff (WS): **Al=Aluminium**  
**UNI 9006-T6 (Al)**  
geeignet z. Harteloxieren

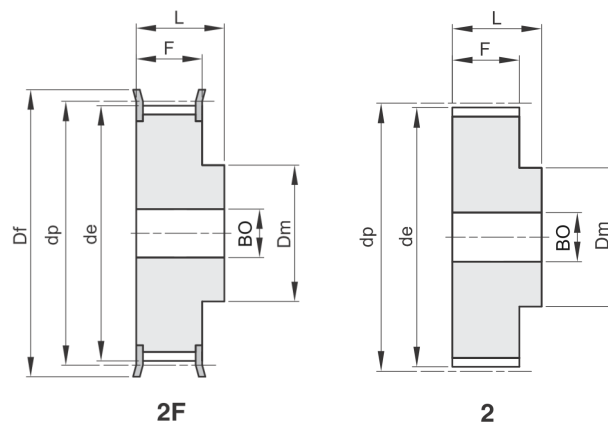


| Bestellnummer | Code        | Typ | WS | ZZ | de     | Df  | Dm  | F  | L  | BO |
|---------------|-------------|-----|----|----|--------|-----|-----|----|----|----|
| 930-006-0018  | 47 AT 10 18 | 2F  | Al | 18 | 55,45  | 60  | 40  | 37 | 47 | 10 |
| 930-006-0019  | 47 AT 10 19 | 2F  | Al | 19 | 58,65  | 66  | 44  | 37 | 47 | 10 |
| 930-006-0020  | 47 AT 10 20 | 2F  | Al | 20 | 61,80  | 66  | 46  | 37 | 47 | 12 |
| 930-006-0022  | 47 AT 10 22 | 2F  | Al | 22 | 68,20  | 75  | 52  | 37 | 47 | 12 |
| 930-006-0024  | 47 AT 10 24 | 2F  | Al | 24 | 74,55  | 83  | 58  | 37 | 47 | 12 |
| 930-006-0025  | 47 AT 10 25 | 2F  | Al | 25 | 77,75  | 83  | 60  | 37 | 47 | 12 |
| 930-006-0026  | 47 AT 10 26 | 2F  | Al | 26 | 80,90  | 87  | 60  | 37 | 47 | 12 |
| 930-006-0027  | 47 AT 10 27 | 2F  | Al | 27 | 84,05  | 91  | 60  | 37 | 47 | 12 |
| 930-006-0028  | 47 AT 10 28 | 2F  | Al | 28 | 87,25  | 93  | 60  | 37 | 47 | 12 |
| 930-006-0030  | 47 AT 10 30 | 2F  | Al | 30 | 93,65  | 97  | 60  | 37 | 47 | 12 |
| 930-006-0032  | 47 AT 10 32 | 2F  | Al | 32 | 100,00 | 106 | 65  | 37 | 47 | 12 |
| 930-006-0036  | 47 AT 10 36 | 2F  | Al | 36 | 112,75 | 119 | 70  | 37 | 47 | 16 |
| 930-006-0040  | 47 AT 10 40 | 2F  | Al | 40 | 125,45 | 131 | 80  | 37 | 47 | 16 |
| 930-006-0044  | 47 AT 10 44 | 2   | Al | 44 | 138,20 |     | 88  | 37 | 47 | 16 |
| 930-006-0048  | 47 AT 10 48 | 2   | Al | 48 | 150,95 |     | 95  | 37 | 47 | 16 |
| 930-006-0060  | 47 AT 10 60 | 2   | Al | 60 | 189,15 |     | 110 | 37 | 47 | 16 |

## Bezeichnung: AT 10

Teilung: **10 mm**  
Für Zahnriemenbreite: **50 mm**

Werkstoff (WS): **Al=Aluminium**  
UNI 9006-T6 (Al)  
geeignet z. Harteloxieren

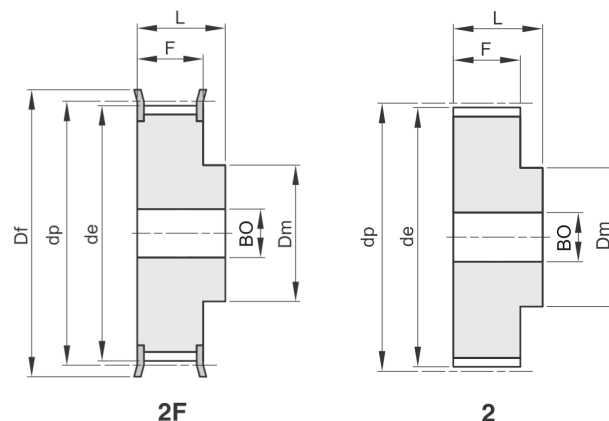

| Bestellnummer | Code        | Typ | WS | ZZ | de     | Df  | Dm  | F  | L  | BO |
|---------------|-------------|-----|----|----|--------|-----|-----|----|----|----|
| 930-007-0018  | 66 AT 10 18 | 2F  | Al | 18 | 55,45  | 60  | 40  | 56 | 66 | 10 |
| 930-007-0019  | 66 AT 10 19 | 2F  | Al | 19 | 58,65  | 66  | 44  | 56 | 66 | 10 |
| 930-007-0020  | 66 AT 10 20 | 2F  | Al | 20 | 61,80  | 66  | 46  | 56 | 66 | 12 |
| 930-007-0022  | 66 AT 10 22 | 2F  | Al | 22 | 68,20  | 75  | 52  | 56 | 66 | 12 |
| 930-007-0024  | 66 AT 10 24 | 2F  | Al | 24 | 74,55  | 83  | 58  | 56 | 66 | 12 |
| 930-007-0025  | 66 AT 10 25 | 2F  | Al | 25 | 77,75  | 83  | 60  | 56 | 66 | 12 |
| 930-007-0026  | 66 AT 10 26 | 2F  | Al | 26 | 80,90  | 87  | 60  | 56 | 66 | 12 |
| 930-007-0027  | 66 AT 10 27 | 2F  | Al | 27 | 84,05  | 91  | 60  | 56 | 66 | 12 |
| 930-007-0028  | 66 AT 10 28 | 2F  | Al | 28 | 87,25  | 93  | 60  | 56 | 66 | 12 |
| 930-007-0030  | 66 AT 10 30 | 2F  | Al | 30 | 93,65  | 97  | 60  | 56 | 66 | 12 |
| 930-007-0032  | 66 AT 10 32 | 2F  | Al | 32 | 100,00 | 106 | 65  | 56 | 66 | 12 |
| 930-007-0036  | 66 AT 10 36 | 2F  | Al | 36 | 112,75 | 119 | 70  | 56 | 66 | 16 |
| 930-007-0040  | 66 AT 10 40 | 2F  | Al | 40 | 125,45 | 131 | 80  | 56 | 66 | 16 |
| 930-007-0044  | 66 AT 10 44 | 2   | Al | 44 | 138,20 |     | 88  | 56 | 66 | 16 |
| 930-007-0048  | 66 AT 10 48 | 2   | Al | 48 | 150,95 |     | 95  | 56 | 66 | 16 |
| 930-007-0060  | 66 AT 10 60 | 2   | Al | 60 | 189,15 |     | 110 | 56 | 66 | 16 |

